

where the world turns for couplings

Lovejoy[®]

Grid

In This Section:

- Horizontal Cover Style
- Vertical Cover Style
- Full Spacer Style
- Half Spacer Style



GD

Grid

Safety Warning

When using Lovejoy products, you must follow these instructions and take the following precautions. Failure to do so may cause the power transmission product to break and parts to be thrown with sufficient force to cause severe injury or death.

Refer to this Lovejoy Catalog for proper selection, sizing, horsepower, torque range, and speed range of power transmission products, including elastomeric elements for couplings. Follow the installation instructions included with the product, and in the individual product catalogs for proper installation of power transmission products. Do not exceed catalog ratings.

During start up and operation of power transmission product, avoid sudden shock loads. Coupling assembly should operate quietly and smoothly. If coupling assembly vibrates or makes beating sound, shut down immediately, and recheck alignment. Shortly after initial operation and periodically thereafter, where applicable, inspect coupling assembly for: alignment, wear of elastomeric element, bolt torques, and flexing elements for signs of fatigue. Do not operate coupling assembly if alignment is improper, or where applicable, if elastomeric element is damaged, or worn to less than 75% of its original thickness.

Do not use any of these power transmission products for elevators, man lifts, or other devices that carry people. If the power transmission product fails, the lift device could fall resulting in severe injury or death.

For all power transmission products, you must install suitable guards in accordance with OSHA and American Society of Mechanical Engineers Standards. Do not start power transmission product before suitable guards are in place. Failure to properly guard these products may result in severe injury or death from personnel contacting moving parts or from parts being thrown from assembly in the event the power transmission product fails.

If you have any questions, contact the Lovejoy Engineering Department at 1-630-852-0500.

where the world turns for couplings



Grid

Table of Contents

| | Running Page No. | Section Page No. |
|--|---------------------|---------------------|
| Overview..... | 216 | GD-4 |
| Selection Process..... | 217 | GD-5 |
| Application Service Factors > Selection Data | 219 | GD-7 |
| Selection Data | 221 | GD-9 |
| Tapered Hub Inch Bore / Keyway > Item Selection | 222 | GD-10 |
| Tapered Hub Metric Bore / Keyway and Tapered Hub > Item Selection..... | 223 | GD-11 |
| Tapered / Straight Components > Item Selection..... | 224 | GD-12 |
| Interchange Chart > Item Selection..... | 225 | GD-13 |
| Misalignment Capacity > Item Selection | 226 | GD-14 |
| Horizontal Style > Dimensional Data..... | 227 | GD-15 |
| Vertical Style > Dimensional Data | 228 | GD-16 |
| Spacer Style > Dimensional / Performance Data..... | 229 | GD-17 |
| Full Spacer / Half Spacer > Dimensional Data | 230 | GD-18 |

GD

The Power of Torsional Dampening

The Lovejoy Grid coupling reduces vibration by as much as 30%, and cushions shock loads to safeguard your driving and driven equipment. The flexible nature of the spring-like grid absorbs impact energy by spreading it out over time, thus reducing the magnitude of the peak loads. This is possible because of the progressive contact that occurs between the curved profile of the hub teeth and the flexible grid. Therefore, as the load increases, more of the tooth comes into contact with the grid, thus supplying superior protection and performance.

Lovejoy's Grid couplings are designed for versatility. Common hubs and grids are used within a given size range for both horizontal and vertical split cover models. Grid installation and replacement is a "snap" at only a fraction of the complete coupling cost.

Features

- Our Tapered Grid coupling is fully interchangeable with industry standards
- Quick installation and easy maintenance reduces labor and downtime costs
- Torsionally flexible and resilient - reduces vibration, plus cushions shock and impact loads
- Versatile stock components can be used with either horizontal or vertical covers
- Cover fasteners available in either Metric or Imperial sizes
- High tensile, shot-peened alloy steel grids and precision machined hubs ensure superior performance and long life

Top Quality Manufacturing

Made from a high tensile alloy steel, the grid spring is carefully formed to shape, then hardened and tempered under controlled conditions. Next, the grids are shot-peened, compressing the surface molecules and leaving a residually stressed surface. This process creates a stronger surface in compression.

Any load applied on the coupling in operation must first surmount the compressive forces created by peening before the tensile stress reaches the grid. This provides a dramatic increase in rating over other coupling types, increases reserve strength for longer life and may permit selection of a smaller coupling, thus reducing cost.

The Lovejoy Grid spring/hub tooth arrangement has been specifically designed for optimum performance and reliability. Not only does the hub tooth profile permit progressive loading under torsional shock conditions, but unique root radii are incorporated to significantly improve the fatigue life of the teeth.



Horizontally Split Cover

- Ideal for limited space
- Allows easy access to grid
- Well-suited for reversing service
- Manufactured from die-cast aluminum



Vertically Split Cover

- Ideal for higher operating speeds
- Manufactured from stamped steel



Full Spacer Design

- Ideal for pump applications because drop-out section allows for pump servicing
- Used only with horizontally split cover
- Stock for sizes 1020-1090



WARNING

You must refer to page GD-2 (Page 214) for Important Safety Instructions and Precautions for the selection and use of these products. Failure to follow the instructions and precautions can result in severe injury or death.



Grid Coupling Selection Process

The selection process for determining the proper grid coupling size requires using the charts shown on the following pages. There are three components to be selected: two hubs and one cover. When the shaft size of the driver and driven of the application are of the same diameter, the hubs selected will be the same. When shaft diameters differ, hubs selected will differ accordingly.

Information necessary before a grid coupling can be selected:

- HP (or KW) and RPM or Torque of driver
- Shaft sizes and type of fit of driver and driven equipment and corresponding keyways
- Shaft gap
- Physical space limitations
- Application description
- Environmental conditions (i.e. extreme temperature, corrosive conditions, space limitations)

For applications with high peak loads or brake applications use the formulas given on page GD-6 or consult Application Engineering for assistance. The following information is required for high peak loads or brake applications:

- System peak torque and frequency
- Duty cycle
- Brake torque rating

List of Charts provided for Selection:

- Chart 1 - Application Service Factors (pages GD-7 and GD-8)
- Chart 2 - General Service Factors (page GD-9)
- Chart 3 - Coupling Torque and Horsepower Ratings (page GD-9)

Formulas:

$$\text{Nominal Torque} = \text{in-lb} = \frac{(\text{HP} \times 63025)}{\text{RPM}}$$

$$\text{Nm} = \frac{(\text{KW} \times 9550)}{\text{RPM}}$$

$$\text{Design Torque} = \text{Nominal Torque} \times \text{Service Factor}$$



Steps In Selecting A Grid Coupling

Step 1: Determine the Nominal Torque of your application by using the following formula:

$$\text{Nominal Torque} = \text{in-lb} = \frac{(\text{HP} \times 63025)}{\text{RPM}}$$

$$\text{Nm} = \frac{(\text{KW} \times 9550)}{\text{RPM}}$$

Once this value is located, refer to the corresponding coupling size in the first column of the Grid Series Torque and Horsepower Performance Data Chart 3 (page GD-9). Refer to the maximum RPM value for the torque capability to ensure that the application requirements are met. If the requirement is not satisfied at this point, a different cover style or another type of coupling may be required for the application, and Lovejoy Application Engineering should be contacted.

Step 2: Using the Application Service Factors Chart 1 (pages GD-7 and GD-8), select the service factor which best corresponds to your application. If you cannot locate a service factor for your application, choose an appropriate value from the General Service Factors Chart 2 (page GD-9).

Step 5: Refer to the Grid Series Torque and Horsepower Performance Data Chart 3 (page GD-9) and compare the application driver/driven shaft sizes to the maximum bore size available on the coupling selected. If coupling bore size is not large enough for the shaft diameter, select the next largest coupling that will accommodate the driver/driven shaft diameters.

Step 3: Calculate the Design Torque of your application by multiplying the Nominal Torque calculated in Step 1 by the Application Service Factor determined in Step 2.

$$\text{Design Torque} = \text{Nominal Torque} \times \text{Service Factor}$$

Step 6: Using the Item Selection tables (pages GD-10 and G-11), find the appropriate Bore and Keyway sizes required and locate the Lovejoy UPC number. Next locate the appropriate Lovejoy UPC number for the Grid and Cover assembly (page GD-12).

Step 4: Using the Grid Series Torque and Horsepower Performance Data Chart 3 (page GD-9) scan down the torque rating to the first value that is greater than or equal to the Design Torque calculated in Step 3.



Selection Example

A coupling is needed to connect a 50 HP standard electric motor rated at 1,800 RPM to a rotary compressor. The shaft size of the electric motor (driver) is 1.75 inches and the compressor (driven) is 1.5 inches. The shaft connections are .75 inches long. There are no special environmental conditions.

Step 1: Determine the Nominal Torque:

$$\begin{aligned} \text{Nominal Torque} &= \text{in-lb} = \frac{(\text{HP} \times 63025)}{\text{RPM}} \\ &= \frac{(50 \times 63025)}{1800} \\ &= 1750.69 \end{aligned}$$

Step 2: Using the Application Service Factors Chart 1 (pages GD-7 and GD-8), select the service factor which best corresponds to your application. The Application Service Factor for an electric motor driving a rotary compressor is 1.25. The value of 1.25 is found under the application category Compressor, Rotary, column; Electric Motor in Chart 1.

Step 3: Calculate the Design Torque of your application :

$$\begin{aligned} \text{Design Torque} &= \text{Nominal Torque} \times \text{Service Factor} \\ &= 1750.69 \times 1.25 \\ &= 2188.37 \text{ in-lb} \end{aligned}$$

Step 4: Referencing the Grid Series Torque and Horsepower Performance Data Chart 3 (page GD-9), use the Torque Ratings column to determine the proper coupling size. Scanning down the Torque Ratings column, the first entry to accommodate the Design Torque value of 2188.37 in-lb is size 1050 with a nominal torque rating of 3500 in-lb. The maximum RPM of 1800 on the electric motor of the application does not exceed the 4,500 RPM maximum allowed for this size with the horizontal cover.

Step 5: Refer to the Grid Series Torque and Horsepower Performance Data Chart 3 (page GD-9) and compare the application driver/driven shaft sizes to the maximum bore size available in the coupling selected. The electric motor (driver) of this application has a shaft size of 1.75 inches and the compressor (driven) has a shaft size of 1.5 inches. The 1050 coupling has a maximum bore of 1.875 inches, so it can accommodate the driver/driven shaft sizes.

Therefore, the proper coupling size for this application is a 1050 coupling with a horizontal cover.

Step 6: Using the UPC Number Selection Tables (pages GD-10 and GD-11), locate the appropriate Lovejoy UPC numbers.

Locate the Tapered Hub Inch selection chart (page GD-10) The first bore size to be located is for the 1.75 inch shaft on the electric motor. Scan down the Bore/Keyway column to the 1.75 inch bore entry. Read across to the 1050 column to locate the Lovejoy UPC number of 05483.

The second bore size to be located is for the 1.5 inch shaft on the compressor. Scan down the Bore/Keyway column to the 1.5 inch bore entry. Read across to the 1050 column to locate the Lovejoy UPC number of 05481.

Using the Components Tables on pages GD-12 locate the cover/grid assembly by scanning across the Grid Size row to the 1050 entry. Read down to the Horizontal Cover/Grid Assembly-Inch row to locate the Lovejoy UPC number of 05352.

Each of these Lovejoy UPC numbers should be prefixed with the Lovejoy UPC number of 697904.

GD

Selecting A Grid Coupling For High Peak Loads Or Brake Applications

Use this selection method in the following instances: 1) High Peak Loads 2) Brake Applications (A brake is part of the system but it is not part of the actual coupling.)

Step 1: Calculate the Design Peak Torque using one of the following equations:
Non-Reversing High Peak Torque =

$$\begin{aligned} \text{in-lb} &= \text{System Peak Torque} \\ \text{Nm} &= \text{System Peak Torque} \\ \text{in-lb} &= \frac{(\text{System Peak HP} \times 63025)}{\text{RPM}} \\ \text{Nm} &= \frac{(\text{System Peak KW} \times 9550)}{\text{RPM}} \end{aligned}$$

Reversing High Peak Torque =

$$\begin{aligned} \text{in-lb} &= 2 \times \text{System Peak Torque} \\ \text{Nm} &= 2 \times \text{System Peak Torque} \\ \text{in-lb} &= \frac{(2 \times \text{System Peak HP} \times 63025)}{\text{RPM}} \\ \text{Nm} &= \frac{(2 \times \text{System Peak KW} \times 9550)}{\text{RPM}} \end{aligned}$$

Occasional Peak Torques (Reversing or Non-Reversing) =

$$\begin{aligned} \text{in-lb} &= 0.5 \times \text{System Peak Torque} \\ \text{Nm} &= 0.5 \times \text{System Peak Torque} \\ \text{in-lb} &= \frac{(0.5 \times \text{System Peak HP} \times 63025)}{\text{RPM}} \\ \text{Nm} &= \frac{(0.5 \times \text{System Peak KW} \times 9550)}{\text{RPM}} \end{aligned}$$

Step 2: If the application is a brake application and the torque rating of the brake exceeds the motor torque, the brake torque needs to be used with the Application Service Factor selected in Chart 1 (pages GD-7 and GD-8).

$$\text{Design Torque} = \text{Brake Torque Rating} \times \text{Service Factor}$$

Step 3: Once the Design Torque has been determined go through steps 4 through 6 of the selection process on page GD-6 to determine the proper coupling size.



Grid Application Service Factors Selection Data

Application Service Factors

Chart 1

| | Service Factors | | | | | Service Factors | | | | | Service Factors | | | |
|---|--------------------------------------|---------------------------------------|--|--|--|--------------------------------------|---------------------------------------|--|--|--|--------------------------------------|---------------------------------------|--|--|
| | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl | | | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl | | | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl | |
| Aggregate Processing, Cement, Mining Kilns; Tube, Rod and Ball Mills | | | | | Coilers (Up or Down) Cold Mills only, Cooling Beds, Mill Tables Hot Bed or | | | | | Couch, Cylinder, Dryer, Pulp Grinder, Fourdrinier, Press, Suction Roll..... | 1.75 | 2.75 | 2.25 | |
| Dryer, Rotary, Hammermill or Hog, Tumbling Mill or Barrel, Direct or on L.S. Shaft of Reducer, with Final Drive of Single Helical or Herringbone Gears... | 1.75 | 2.75 | 2.25 | | Transfer, Non-Reversing | 1.50 | 2.50 | 2.00 | | Barker Auxiliary, Hydraulic, Mechanical, Barking Drum L.S. Shaft of Reducer with Final Drive-Helical or Herringbone Gear, Cutter, Felt Whipper, Jordan, Log Haul | 2.00 | 3.00 | 2.50 | |
| Grizzly, Direct or on L.S. Shaft of Reducer, with Final Drive of Machined Spur Gears..... | 2.00 | 3.00 | 2.50 | | Coilers (Up or Down) Hot Mills only, Coke Plants Door Opener, Drawbench, Furnace Pushers, Hot and Cold Saws, Ingot Cars, Mill Tables Runout, Non-Reversing, Non-Plugging, Screwdown, Seamless Tube Mills -Thrust Block, Tube Conveyor Rolls, Reeler, Kick Out, Soaking Pit Cover Drives - Travel, Straighteners, | | | | | Barking Drum L.S. Shaft of Reducer with Final Drive-Machined Spur Gear, Chipper.. | 2.50 | * | * | |
| Crushers, Ore or Stone | 2.50 | * | * | | Unscramblers..... | 2.00 | 3.00 | 2.50 | | Barking Drum L.S. Shaft of Reducer with Final Drive-Cast Tooth Spur Gear | 3.00 | * | * | |
| Brewing and Distilling | | | | | Coke Plants Pusher Ram Drive, | 2.50 | * | * | | Rubber Industry | | | | |
| Bottle and Can Filling Machines, Brew Kettle..... | 1.00 | 2.00 | 1.50 | | Coke Plants Pusher or Larry Car Traction Drive, Feed Rolls-Blooming Mills, Manipulators, Mill Tables Roughing Breakdown Mills, Runout, Reversing, Seamless Tube Mills Piercer, Sideguards | 3.00 | * | * | | Tire/Tube Press Opener (Peak Torque)..... | 1.00 | 2.00 | 1.50 | |
| Cookers, Continuous Duty, Mash Tub | 1.25 | 2.25 | 1.75 | | Cold Mills, Hot Mills, Merchant Mills, Rod Mills, Skelp Mills..... | Refer To Lovejoy | | | | Extruder, Mixing Mill, Refiner or Sheeter (Five or More in Line), Tuber, Strainer, Pelletizer, Warming Mill (Three or More in Line) | 1.75 | 2.75 | 2.25 | |
| Lauter Tub..... | 1.50 | 2.50 | 2.00 | | Oil Industry | | | | | Calender, Mixing Mill, Refiner or Sheeter (Three/Four in Line), Warming Mill (One/Two in Line) | 2.00 | 3.00 | 2.50 | |
| Scale Hopper, Frequent Peaks ... | 1.75 | 2.75 | 2.25 | | Chiller..... | 1.25 | 2.25 | 1.75 | | Cracker, Plasticator, Mixing Mill, Refiner or Sheeter (One/Two in line), Intensive or Banbury Mixer, Tire Building Machine, Washer..... | 2.50 | * | * | |
| Clay Working Industry | | | | | Paraffin Filter Press | 1.50 | 2.50 | 2.00 | | Sewage Disposal Equipment | | | | |
| Brick Press, Briquette Machine, Clay Working Machine, Plug Mill..... | 1.75 | 2.75 | 2.25 | | Oilwell Pumping (not over 150% Peak Torque), Rotary Kiln..... | 2.00 | 3.00 | 2.50 | | Bar Screen, Chemical Feeders, Collectors, Dewatering Screen, Grit Collector | 1.00 | 2.00 | 1.50 | |
| Dredges | | | | | Paper Mills | | | | | Sugar Industry | | | | |
| Conveyors..... | 1.25 | 2.25 | 1.75 | | Bleachers, Coaters, Stock Pumps, Centrifugal Constant Speed..... | 1.00 | 2.00 | 2.50 | | Mill Stands, Turbine Driven with all Helical or Herringbone Gears | 1.50 | 2.50 | 2.00 | |
| Maneuvering Winch, Pumps (Uniform Load), Utility Winch.... | 1.50 | 2.50 | 2.00 | | Converting Machine, Felt Stretcher, Stock Pumps, Centrifugal Frequent Speed Changes Under Load | 1.25 | 2.25 | 1.75 | | Cane Carrier & Leveler, Electric Drive or Steam Engine Drive with Helical Herringbone, or Spur Gears with any Prime Mover | 1.75 | 2.75 | 2.25 | |
| Cable Reel, Screen Drive, Stacker | 1.75 | 2.75 | 2.25 | | Line Shaft, Reel, Rewinder, Winder, Stock Chest, Washer, Thickener | 1.50 | 2.50 | 2.00 | | Cane Knife & Crusher..... | 2.00 | 3.00 | 2.50 | |
| Cutter Head, Jig Drive | 2.00 | 3.00 | 2.50 | | Beater, Pulper, Calender, | | | | | | | | | |
| Food Industry | | | | | | | | | | | | | | |
| Bottling, Can Filling Machine | 1.00 | 2.00 | 1.50 | | | | | | | | | | | |
| Cereal Cooker..... | 1.25 | 2.25 | 1.75 | | | | | | | | | | | |
| Beet Slicer, Dough Mixer, Meat Grinder..... | 1.75 | 2.75 | 2.25 | | | | | | | | | | | |
| Lumber | | | | | | | | | | | | | | |
| Rolls, Non-Reversing, Sawdust Conveyor..... | 1.25 | 2.25 | 1.75 | | | | | | | | | | | |
| Band Resaw, Sorting Table | 1.50 | 2.50 | 2.00 | | | | | | | | | | | |
| Circular Resaw, Cut-off, Planer, Slab Conveyor, Trimmer | 1.75 | 2.75 | 2.25 | | | | | | | | | | | |
| Edger, Head Rig, Hog, Log Haul, Rolls, Reversing | 2.00 | 3.00 | 2.50 | | | | | | | | | | | |
| Gang Saw (Reciprocating)..... | Refer To Lovejoy | | | | | | | | | | | | | |
| Metal Rolling Mills¹ | | | | | | | | | | | | | | |
| Soaking Pit Cover Drives - Lift | 1.00 | 2.00 | 1.50 | | | | | | | | | | | |

Notes: ■ 1 indicates: For high peak load applications, please refer to selection process on page GD-6.
 ■ * indicates: That Lovejoy Application Engineering should be consulted with specific requirements.
 ■ Caution: Applications involving reciprocating engines and reciprocating driven devices are subject to critical rotational speeds which may damage the coupling and/or connected equipment. Contact Lovejoy Application Engineering with specific requirements.

GD



Grid

Application Service Factors

Selection Data

Application Service Factors

Chart 1, Continued

| | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl | | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl | | Electric Motor w/ Standard Torque | Reciprocating Engines-4/5 Cylinder | Reciprocating Engines-6 or more Cyl |
|---|--------------------------------------|---------------------------------------|--|---|--------------------------------------|---------------------------------------|--|---|--------------------------------------|---------------------------------------|--|
| Textile Industry | | | | Cranes, Hoist^{1, 2} | | | | Machine, Forming Mills..... | 2.00 | 3.00 | 2.50 |
| Batcher, Dyeing Machinery, | | | | Slope..... | 1.50 | 2.50 | 2.00 | Mixers (see Agitators) | | | |
| Mangle, Napper, Soaper..... | 1.25 | 2.25 | 1.75 | Main or Skip Hoist, Bridge, | | | | Muller | 1.50 | 2.50 | 2.00 |
| Calender, Card Machine, Cloth | | | | Travel, Trolley ² | 1.75 | 2.75 | 2.25 | Concrete | 1.75 | 2.75 | 2.25 |
| Finishing Machine, Dry Can, | | | | Dynamometer | 1.00 | 2.00 | 1.50 | Printing Press | 1.50 | 2.50 | 2.00 |
| Loom, Spinner, Tenter Frame, | | | | Elevators² | | | | Pug Mill | 1.75 | 2.75 | 2.25 |
| Winder..... | 1.50 | 2.50 | 2.00 | Bucket, Centrifugal, Discharge, | | | | Pulverizers | | | |
| Knitting Machine..... | Refer To Lovejoy | | | Gravity Discharge | 1.25 | 2.25 | 1.75 | Roller..... | 1.50 | 2.50 | 2.00 |
| | | | | Freight or Passenger..... | NOT APPROVED | | | Hammermill, Hog..... | 1.75 | 2.75 | 2.25 |
| Applications | | | | Escalators | NOT APPROVED | | | Pumps | | | |
| Aerator | 2.00 | 3.00 | 2.50 | Exciter, Generator | 1.00 | 2.00 | 1.50 | Centrifugal Constant Speed | 1.00 | 2.00 | 1.50 |
| Agitators | | | | Extruder, Plastic | 1.50 | 2.50 | 2.00 | Centrifugal Frequent Speed | | | |
| Vertical/Horizontal Screw, Pro- | | | | Fans | | | | Changes under Load, Descaling, | | | |
| peller, Paddle | 1.00 | 2.00 | 1.50 | Centrifugal, Forced Draft Motor | | | | w/ Accumulators, Gear, Rotary, | | | |
| Barge Haul Puller | 1.50 | 2.50 | 2.00 | Driven thru Fluid or Electric Slip | | | | Vane | 1.25 | 2.25 | 1.75 |
| Blowers | | | | Clutch..... | 1.00 | 2.00 | 1.50 | Reciprocating, 3 or more | | | |
| Centrifugal..... | 1.00 | 2.00 | 1.50 | Induced Draft with Damper Con- | | | | Cylinders | 1.50 | 2.50 | 2.00 |
| Lobe, Vane..... | 1.25 | 2.25 | 1.75 | trol or Blade Cleaner..... | 1.25 | 2.25 | 1.75 | Reciprocating, 2 Cyl. Double | | | |
| Car Dumpers | 2.50 | * | * | Forced Draft-Across the Line | | | | Acting | 1.75 | 2.75 | 2.25 |
| Car Pullers | 1.50 | 2.50 | 2.00 | start, Gas Recirculating | 1.50 | 2.50 | 2.00 | Reciprocating, 2 Cyl. Single | | | |
| Clarifier, Classifier | 1.00 | 2.00 | 1.50 | Cooling Tower, Induced Draft | | | | Acting | 2.00 | 3.00 | 2.50 |
| Compressors | | | | without Controls | 2.00 | 3.00 | 2.50 | Reciprocating, 1 Cyl. Single/ Double Acting..... | 3.00 | * | * |
| Centrifugal, Rotary, Screw..... | 1.00 | 2.00 | 1.50 | Feeders | | | | Screens | | | |
| Rotary, Lobe or Vane | 1.25 | 2.25 | 1.75 | Apron, Belt, Disc, Screw..... | 1.00 | 2.00 | 1.50 | Air Washing, Water | 1.00 | 2.00 | 1.50 |
| Reciprocating with Flywheel and | | | | Reciprocating..... | 2.50 | * | * | Rotary Coal, Sand | 1.50 | 2.50 | 2.00 |
| Gear between Compressor and | | | | Generators | | | | Grizzly | 2.00 | 3.00 | 2.50 |
| Prime Mover 4 or More Cyl. | | | | Even Load..... | 1.00 | 2.00 | 1.50 | Vibrating..... | 2.50 | * | * |
| Single/Double Acting..... | 1.75 | 2.75 | 2.25 | Hoist or Railway Service..... | 1.50 | 2.50 | 2.00 | Ski Tows, Lifts | NOT APPROVED | | |
| Reciprocating with flywheel | | | | Welder Load | 2.00 | 3.00 | 2.50 | Steering Gear | 1.00 | 2.00 | 1.50 |
| and Gear between Compressor | | | | Hammermill | 1.75 | 2.75 | 2.25 | Stoker | 1.00 | 2.00 | 1.50 |
| and Prime Mover Cyl. Double | | | | Laundrywasher or Tumbler | 2.00 | 3.00 | 2.50 | Tumbling Barrel | 1.75 | 2.75 | 2.25 |
| Acting | 2.00 | 3.00 | 2.50 | Line Shafts | | | | Winch, Maneuvering | | | |
| Reciprocating with Flywheel and | | | | Any Processing Machinery..... | 1.50 | 2.50 | 2.00 | Dredge, Marine..... | 1.50 | 2.50 | 2.00 |
| Gear between Compressor and | | | | Machine Tools | | | | Windlass | 1.50 | 2.50 | 2.00 |
| Prime Mover 1/2 Cyl. Single/ Double Acting and 3 cyl. | | | | Auxiliary, Traverse Drive..... | 1.00 | 2.00 | 1.50 | Woodworking Machinery | 1.00 | 2.00 | 1.50 |
| Single Acting | 3.00 | * | * | Main Drive..... | 1.50 | 2.50 | 2.00 | Work Lift Platforms | NOT APPROVED | | |
| Reciprocating Direct Connected, Without Flywheels..... | Refer To Lovejoy | | | Bending Roll, Notching Press, Punch Press, Planer, Plate | | | | | | | |
| Conveyors² | | | | Reversing..... | 1.75 | 2.75 | 2.25 | | | | |
| Apron, Assembly, Belt, Chain, | | | | Manlifts | NOT APPROVED | | | | | | |
| Flight, Screw | 1.00 | 2.00 | 1.50 | Metal Forming Machines | | | | | | | |
| Bucket..... | 1.25 | 2.25 | 1.75 | Slitters | 1.00 | 2.00 | 1.50 | | | | |
| Live Roll, Shaker, | | | | Wire Winder, Coilers, Uncoilers... | 1.50 | 2.50 | 2.00 | | | | |
| Reciprocating..... | 3.00 | * | * | Wire Drawing, Flattening | 1.75 | 2.75 | 2.25 | | | | |
| | | | | Draw Bench Carriage, Main Drive, Extruder, Forming | | | | | | | |

Notes: ■ 1 indicates: For high peak load applications, please refer to selection process on page GD-6.
 ■ 2 indicates: If people are transported Lovejoy does not recommend and will not warranty the use of the coupling.
 ■ * indicates: That Lovejoy Application Engineering should be consulted with specific requirements.
 ■ Caution: Applications involving reciprocating engines and reciprocating driven devices are subject to critical rotational speeds which may damage the coupling and/or connected equipment. Contact Lovejoy Application Engineering with specific requirements.



Selection Data

General Service Factors

Chart 2

| Typical Applications for Electric Motor or Turbine Driven Equipment | Typical Service Factor |
|--|---|
| Constant Torque such as Centrifugal Pumps, Blowers, and Compressors. | 1.0 |
| Continuous Duty with some torque variations including Printing Presses, Extruders, Forced Draft Fans. | 1.5 |
| Light shock loads from Briquetting Machine, Rubber Calender, or Crane and Hoist. | 2.0 |
| Moderate shock loading as expected from a Car Dumper, Reciprocating Feeder, or Vibrating Screen. | 2.5 |
| Heavy Shock load with some negative torques from Crushers, Manipulators, and Braking Drum. | 3.0 |
| Applications like Reciprocating Compressors with frequent torque reversals which do not necessarily cause reverse rotations. | Consult Lovejoy Application Engineering |

Taper Lock Bushing Hub Torque Ratings

Chart 1

| Size | Taper-Lock Bushing | Max Bore ¹ Bushing in | Max Torque Bushing in-lbs | Rated Torque Coupling in-lbs |
|------|--------------------|----------------------------------|---------------------------|------------------------------|
| 1030 | 1108 | 1.125 | 1,300 | 1,200 |
| 1040 | 1108 | 1.125 | 1,300 | 2,000 |
| 1050 | 1215 | 1.25 | 3,550 | 3,500 |
| 1060 | 1615 | 1.625 | 4,300 | 5,500 |
| 1070 | 2012 | 2 | 7,150 | 8,000 |
| 1080 | 2525 | 2.5 | 11,300 | 16,500 |
| 1090 | 3030 | 3 | 24,000 | 30,000 |
| 1100 | 3030 | 3 | 24,000 | 50,500 |
| 1110 | 3535 | 3.5 | 44,800 | 75,000 |
| 1120 | 4040 | 4 | 77,300 | 110,000 |

Note: ■ 1 indicates: The maximum bore is with a standard keyway.

Grid Series Torque and Horsepower Performance Data

Chart 3

| Size | Torque Ratings | | Basic HP Ratings @ Varying RPM | | | | Max Bore | | Horizontal Max RPM | Vertical Max RPM |
|------|----------------|---------|--------------------------------|-----------|-----------|----------|----------|-----|--------------------|------------------|
| | in-lbs | Nm | 100 | 1200 | 1800 | 3600 | in | mm | | |
| 1020 | 460 | 52 | 0.73 | 8.50 | 13.10 | 26.30 | 1.125 | 27 | 4,500 | 6,000 |
| 1030 | 1,320 | 149 | 2.09 | 24.50 | 37.70 | 75.40 | 1.375 | 35 | 4,500 | 6,000 |
| 1040 | 2,200 | 249 | 3.49 | 40.80 | 62.80 | 126.00 | 1.625 | 44 | 4,500 | 6,000 |
| 1050 | 3,850 | 435 | 6.11 | 71.50 | 110.00 | 220.00 | 1.875 | 51 | 4,500 | 6,000 |
| 1060 | 6,050 | 683 | 9.60 | 112.00 | 173.00 | 346.00 | 2.125 | 57 | 4,350 | 6,000 |
| 1070 | 8,800 | 994 | 14.00 | 163.00 | 251.00 | 503.00 | 2.500 | 68 | 4,125 | 5,500 |
| 1080 | 18,150 | 2 051 | 28.80 | 337.00 | 518.00 | 1,037.00 | 3.000 | 83 | 3,600 | 4,750 |
| 1090 | 33,000 | 3 728 | 52.40 | 613.00 | 942.00 | 1,885.00 | 3.500 | 95 | 3,600 | 4,000 |
| 1100 | 55,550 | 6 276 | 88.10 | 1,031.00 | 1,587.00 | — | 4.000 | 108 | 2,400 | 3,250 |
| 1110 | 82,500 | 9 321 | 131.00 | 1,532.00 | 2,356.00 | — | 4.500 | 117 | 2,250 | 3,000 |
| 1120 | 121,000 | 13 671 | 192.00 | 2,246.00 | 3,456.00 | — | 5.000 | 137 | 2,025 | 2,700 |
| 1130 | 176,000 | 19 884 | 279.00 | 3,267.00 | 5,027.00 | — | 6.000 | 165 | 1,800 | 2,400 |
| 1140 | 253,000 | 28 584 | 401.00 | 4,697.00 | 7,226.00 | — | 7.000 | 184 | 1,650 | 2,200 |
| 1150 | 352,000 | 39 769 | 559.00 | 6,535.00 | 10,053.00 | — | 8.000 | 200 | 1,500 | — |
| 1160 | 495,000 | 55 925 | 785.00 | 9,189.00 | — | — | 9.000 | 228 | 1,350 | — |
| 1170 | 660,000 | 74 567 | 1,047.00 | 12,252.00 | — | — | 10.000 | 254 | 1,225 | — |
| 1180 | 915,200 | 103 399 | 1,452.00 | — | — | — | 11.000 | 280 | 1,100 | — |
| 1190 | 1,210,000 | 136 706 | 1,920.00 | — | — | — | 12.000 | 305 | 1,050 | — |
| 1200 | 1,650,000 | 186 417 | 2,618.00 | — | — | — | 13.000 | 330 | 900 | — |

GD



Grid Tapered Hub Inch Bore / Keyway Item Selection

The Grid coupling consists of:

2 hubs

1 cover and Grid set:

- 1 Grid spring
- 1 Grid cover set
- 1 gasket
- 2 seals
- 1 hardware package

Tapered Hub - Inch Bore and Keyway UPC Number Selection Table

| Bore | Keyway | 1020 | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 | 1100 | 1110 | 1120 | 1130 | 1140 |
|--------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SOLID | | 05231 | 05232 | 05233 | 05234 | 05235 | 05236 | 05237 | 05238 | 05239 | 05240 | 05241 | 05242 | 05243 |
| 1/2 | 1/8 x 1/16 | 05458 | — | — | — | — | — | — | — | — | — | — | — | — |
| 5/8 | 3/16 x 3/32 | 05459 | 05464 | — | — | — | — | — | — | — | — | — | — | — |
| 3/4 | 3/16 x 3/32 | 05460 | 05465 | 06140 | — | — | — | — | — | — | — | — | — | — |
| 7/8 | 3/16 x 3/32 | 05461 | 05466 | 05471 | 06141 | 06142 | — | — | — | — | — | — | — | — |
| 15/16 | 1/4 x 1/8 | 06100 | 06101 | 06103 | 06106 | — | — | — | — | — | — | — | — | — |
| 1 | 1/4 x 1/8 | 05462 | 05467 | 05472 | 06107 | 06112 | — | — | — | — | — | — | — | — |
| 1-1/8 | 1/4 x 1/8 | 05463 | 05468 | 05473 | 05478 | 06113 | 06144 | 07364 | — | — | — | — | — | — |
| 1-3/16 | 1/4 x 1/8 | — | 06102 | 06104 | 06108 | 06114 | — | — | — | — | — | — | — | — |
| 1-1/4 | 1/4 x 1/8 | — | 05469 | 05474 | 05479 | 06115 | 06145 | 06148 | — | — | — | — | — | — |
| 1-3/16 | 5/16 x 5/32 | — | 05470 | 05475 | 05480 | 05485 | 06119 | 06149 | — | — | — | — | — | — |
| 1-7/16 | 3/8 x 3/16 | — | — | 06105 | 06109 | 06116 | 06120 | — | — | — | — | — | — | — |
| 1-1/2 | 3/8 x 3/16 | — | — | 05476 | 05481 | 05486 | 06121 | — | — | — | — | — | — | — |
| 1-5/8 | 3/8 x 3/16 | — | — | 05477 | 05482 | 05487 | 05492 | 06150 | — | — | — | — | — | — |
| 1-11/16 | 3/8 x 3/16 | — | — | — | 06110 | 06117 | 06122 | — | — | — | — | — | — | — |
| 1-3/4 | 3/8 x 3/16 | — | — | — | 05483 | 05488 | 05493 | 06124 | — | — | — | — | — | — |
| 1-13/16 | 1/2 x 1/4 | — | — | — | 06111 | 06118 | 06123 | 06125 | — | — | — | — | — | — |
| 1-7/8 | 1/2 x 1/4 | — | — | — | 05484 | 05489 | 05494 | 06126 | 06154 | — | — | — | — | — |
| 1-15/16 | 1/2 x 1/4 | — | — | — | — | 06143 | 06146 | 06151 | — | — | — | — | — | — |
| 2 | 1/2 x 1/4 | — | — | — | — | 05490 | 05495 | 05500 | 06155 | — | — | — | — | — |
| 2-1/8 | 1/2 x 1/4 | — | — | — | — | 05491 | 05496 | 05501 | 06127 | — | — | — | — | — |
| 2-3/16 | 1/2 x 1/4 | — | — | — | — | — | 06147 | 06152 | 06156 | — | — | — | — | — |
| 2-1/4 | 1/2 x 1/4 | — | — | — | — | — | 05497 | 05502 | 06128 | — | — | — | — | — |
| 2-3/8 | 5/8 x 5/16 | — | — | — | — | — | 05498 | 05503 | 06129 | — | — | — | — | — |
| 2-1/2 | 5/8 x 5/16 | — | — | — | — | — | 05499 | 05504 | 05509 | 05519 | — | — | — | — |
| 2-5/8 | 5/8 x 5/16 | — | — | — | — | — | — | 05505 | 05510 | 05520 | — | — | — | — |
| 2-3/4 | 5/8 x 5/16 | — | — | — | — | — | — | 05506 | 05511 | 05521 | — | — | — | — |
| 2-7/8 | 3/4 x 3/8 | — | — | — | — | — | — | 05507 | 05512 | 05522 | — | — | — | — |
| 2-15/16 | 3/4 x 3/8 | — | — | — | — | — | — | 06153 | 06157 | — | — | — | — | — |
| 3 | 3/4 x 3/8 | — | — | — | — | — | — | 05508 | 05513 | 05523 | 05532 | 05542 | — | — |
| 3-1/8 | 3/4 x 3/8 | — | — | — | — | — | — | — | 05514 | 05524 | 05533 | 05543 | — | — |
| 3-1/4 | 3/4 x 3/8 | — | — | — | — | — | — | — | 05515 | 05525 | 05534 | 05544 | — | — |
| 3-3/8 | 7/8 x 7/16 | — | — | — | — | — | — | — | 05516 | 05526 | 05535 | 05545 | — | — |
| 3 7/16 | 7/8 x 7/16 | — | — | — | — | — | — | — | 06158 | — | — | — | — | — |
| 3-1/2 | 7/8 x 7/16 | — | — | — | — | — | — | — | 05517 | 05527 | 05536 | 05546 | 05553 | — |
| 3-5/8 | 7/8 x 7/16 | — | — | — | — | — | — | — | — | 05528 | 05537 | 05547 | 05554 | — |
| 3-3/4 | 7/8 x 7/16 | — | — | — | — | — | — | — | — | 05529 | 05538 | 05548 | 05555 | — |
| 3-7/8 | 1 x 1/2 | — | — | — | — | — | — | — | — | 05530 | 05539 | 05549 | 05556 | 05562 |
| 4 | 1 x 1/2 | — | — | — | — | — | — | — | — | 05531 | 05540 | 05550 | 05557 | 05563 |
| 4-1/2 | 1 x 1/2 | — | — | — | — | — | — | — | — | — | 05541 | 05551 | 05558 | 05564 |
| 5 | 1-1/4 x 5/8 | — | — | — | — | — | — | — | — | — | — | 05552 | 05559 | 05565 |
| 5-1/2 | 1-1/4 x 5/8 | — | — | — | — | — | — | — | — | — | — | — | 05560 | 05566 |
| 6 | 1-1/2 x 3/4 | — | — | — | — | — | — | — | — | — | — | — | 05561 | 05567 |
| 6-1/2 | 1-1/2 x 3/4 | — | — | — | — | — | — | — | — | — | — | — | — | 05568 |

- Notes: ■ 1020-1090 hubs are provided with a clearance fit bore and 2 set screws at 90°.
 ■ 1100-1140 hubs are provided with an interference fit bore and no set screws.
 ■ When referencing a Lovejoy UPC number in this table, include 697904 as a prefix to the number shown.



Grid

Tapered Hub Metric Bore / Keyway and Taper-Lock Hub Item Selection

The Grid coupling consists of:

2 hubs

1 cover and Grid set:

- 1 Grid spring
- 1 Grid cover set
- 1 gasket
- 2 seals
- 1 hardware package

Tapered Hub - Metric Bore and Keyway UPC Number Selection Table

| Bore | Keyway | 1020 | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 |
|------|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| 14 | 5 x 2.3 | 05780 | — | — | — | — | — | — | — |
| 15 | 5 x 2.3 | 05781 | — | — | — | — | — | — | — |
| 16 | 5 x 2.3 | 05782 | — | — | — | — | — | — | — |
| 19 | 6 x 2.8 | 05783 | 05788 | — | — | — | — | — | — |
| 20 | 6 x 2.8 | 05784 | 05789 | — | — | — | — | — | — |
| 22 | 6 x 2.8 | 05785 | 05790 | — | — | — | — | — | — |
| 24 | 8 x 3.3 | 05786 | 05791 | 05797 | — | — | — | — | — |
| 25 | 8 x 3.3 | 05787 | 05792 | 05798 | — | — | — | — | — |
| 28 | 8 x 3.3 | — | 05793 | 05799 | 05805 | — | — | — | — |
| 30 | 8 x 3.3 | — | 05794 | 05800 | 05806 | — | — | — | — |
| 32 | 10 x 3.3 | — | 05795 | 05801 | 05807 | — | — | — | — |
| 35 | 10 x 3.3 | — | 05796 | 05802 | 05808 | 05812 | 05817 | — | — |
| 38 | 10 x 3.3 | — | — | 05803 | 05809 | 05813 | 05818 | 05823 | — |
| 42 | 12 x 3.3 | — | — | 05804 | 05810 | 05814 | 05819 | 05824 | 05830 |
| 48 | 14 x 3.8 | — | — | — | 05811 | 05815 | 05820 | 05825 | 05831 |
| 55 | 16 x 4.3 | — | — | — | — | 05816 | 05821 | 05826 | 05832 |
| 60 | 18 x 4.4 | — | — | — | — | — | 05822 | 05827 | 05833 |
| 70 | 20 x 4.9 | — | — | — | — | — | — | 05828 | 05834 |
| 80 | 22 x 5.4 | — | — | — | — | — | — | 05829 | 05835 |
| 85 | 22 x 5.4 | — | — | — | — | — | — | — | 05836 |
| 95 | 22 x 5.4 | — | — | — | — | — | — | — | 05837 |

Notes: ■ 1020-1090 hubs are provided with a clearance fit bore and 2 set screws at 90°.

■ When referencing a Lovejoy UPC number in this table, include 697904 as a prefix to the number shown.

Taper Lock Hub - UPC Number Selection Table

| Taper-Lock Hub | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 | 1100 | 1110 | 1120 |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| UNC Thread | 06841 | 06842 | 06843 | 06844 | 06845 | 06846 | 06847 | 06848 | 06849 | 06850 |
| BSW Thread | 06851 | 06852 | 06853 | 06854 | 06855 | 06856 | 06857 | 06858 | 06859 | 06860 |

Note: ■ When referencing a Lovejoy UPC number in this table, include 697904 as a prefix to the number shown.



Grid Tapered / Straight Components Item Selection

Tapered Component UPC Number Selection Table

| Sizes | 1020 | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 | 1100 | 1100 | 1120 | 1130 | 1140 |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Grid Only | 05244 | 05245 | 05246 | 05247 | 05248 | 05249 | 05250 | 05251 | 05252 | 05253 | 05254 | 05255 | 05256 |
| Horizontal Design: | | | | | | | | | | | | | |
| Cover/Grid Assembly-Metric | 05366 | 05367 | 05368 | 05369 | 05370 | 05371 | 05372 | 05373 | 05374 | 05375 | 05376 | 05377 | 05378 |
| Cover/Grid Assembly-Inch | 05349 | 05350 | 05351 | 05352 | 05353 | 05354 | 05355 | 05356 | 05357 | 05358 | 05359 | 05360 | 05361 |
| Cover Set-Metric | 05290 | 05291 | 05292 | 05293 | 05294 | 05295 | 05296 | 05297 | 05298 | 05299 | 05300 | 05301 | 05302 |
| Cover Set-Inch | 05273 | 05274 | 05275 | 05276 | 05277 | 05278 | 05279 | 05280 | 05281 | 05282 | 05283 | 05284 | 05285 |
| Seal Kit | 05176 | 05177 | 05178 | 05179 | 05180 | 05181 | 05182 | 05183 | 05184 | 05185 | 05186 | 05187 | 05188 |
| Cover Hardware-Metric | 05210 | 05210 | 05210 | 05211 | 05211 | 05212 | 05212 | 05212 | 05213 | 05213 | 05214 | 05214 | 05214 |
| Cover Hardware-Inch | 05433 | 05433 | 05433 | 05434 | 05434 | 05435 | 05435 | 05435 | 05436 | 05436 | 05437 | 05437 | 05437 |
| Vertical Design: | | | | | | | | | | | | | |
| Cover/Grid Assembly-Metric | 05400 | 05401 | 05402 | 05403 | 05404 | 05405 | 05406 | 05407 | 05408 | 05409 | 05410 | 05411 | 05412 |
| Cover/Grid Assembly-Inch | 05383 | 05384 | 05385 | 05386 | 05387 | 05388 | 05389 | 05390 | 05391 | 05392 | 05393 | 05394 | 05395 |
| Cover Set-Metric | 05328 | 05329 | 05330 | 05331 | 05332 | 05333 | 05334 | 05335 | 05336 | 05337 | 05338 | 05339 | 05340 |
| Cover Set-Inch | 05307 | 05308 | 05309 | 05310 | 05311 | 05312 | 05313 | 05314 | 05315 | 05316 | 05317 | 05318 | 05319 |
| Seal Kit | 05189 | 05190 | 05191 | 05192 | 05193 | 05194 | 05195 | 05196 | 05197 | 05198 | 05199 | 05200 | 05201 |
| Cover Hardware-Metric | 05215 | 05216 | 05216 | 05217 | 05217 | 05217 | 05218 | 05218 | 05219 | 05219 | 05220 | 05221 | 05222 |
| Cover Hardware-Inch | 05442 | 05443 | 05443 | 05444 | 05444 | 05444 | 05445 | 05445 | 05446 | 05446 | 05447 | 05448 | 05449 |

- Notes:
- "Cover/Grid Assembly" includes ALL components of the coupling, other than the hubs. The terms "metric" and "inch" refer to hardware.
 - "Cover Set" includes all of the above items except the Grid spring.
 - "Seal Kit" contains rubber seals, gasket(s) and lube plugs.
 - "Cover Hardware" includes the fasteners that hold the cover together.
 - Grease packets are included with all cover sets and cover/Grid assemblies thru size 1090.
 - When referencing a Lovejoy UPC number in this table, include 697904 as a prefix to the number shown.

GD

Tapered Hub Component UPC Number Selection Table

| Sizes | 1150 | 1160 | 1170 | 1180 | 1190 | 1200 |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Horizontal Design: | | | | | | |
| Hub 73mm RSB | 05587 | — | — | — | — | — |
| Hub 100mm RSB | — | 05589 | 05591 | — | — | — |
| Hub 125mm RSB | — | — | — | 05593 | — | — |
| Hub 152mm RSB | — | — | — | — | 99508 | — |
| Hub 178mm RSB | — | — | — | — | — | 99257 |
| Grid Only | 05257 | 05258 | 05329 | 05260 | 99254 | 99255 |
| Cover/Grid Assembly-Metric | 05379 | 05380 | 05381 | 05382 | 99270 | 10953 |
| Cover/Grid Assembly-Inch | 05362 | 05363 | 05364 | 05365 | 10555 | 10559 |
| Cover Set-Metric | 05303 | 05304 | 05305 | 05306 | 99271 | 10951 |
| Cover Set-Inch | 05286 | 05287 | 05288 | 05289 | 10556 | 10560 |
| Seal Kit | 05425 | 05426 | 05427 | 05428 | 10557 | 10561 |
| Cover Hardware-Metric | 05429 | 05429 | 05430 | 05430 | — | — |
| Cover Hardware-Inch | 05438 | 05438 | 05439 | 05439 | 10558 | 10562 |

- Notes:
- "Cover/Grid Assembly" includes ALL components of the coupling, other than the hubs. The terms "metric" and "inch" refer to hardware.
 - "Cover Set" includes all of the above items except the Grid spring.
 - "Seal Kit" contains rubber seals, gasket(s) and lube plugs.
 - "Cover Hardware" includes the fasteners that hold the cover together.
 - Grease packets are included with all cover sets and cover/Grid assemblies thru size 1090.
 - When referencing a Lovejoy UPC number in this table, include 697904 as a prefix to the number shown.



Grid Interchange Chart Item Selection


Grid Series Interchange Chart

| Lovejoy® Size | Horizontal — Split cover | | | | Vertical — Split Cover | | | |
|------------------|--------------------------|-------------------------------|----------------------|------------------------|------------------------|-------------------------------|----------------------|------------------------|
| | Falk® Steelflex® | Morse/Browning® Grid-Flex® | Dodge® Grid-Lign® | Kop-Flex® Kop-Grid® | Falk® Steelflex® | Morse/Browning® Grid-Flex® | Dodge® Grid-Lign® | Kop-Flex® Kop-Grid® |
| 1020 | 1020T10 | GF2020H | 1020T10 | 1020H | 1020T20 | GF2020V | 1020T20 | 1020V |
| 1030 | 1030T10 | GF2030H | 1030T10 | 1030H | 1030T20 | GF2030V | 1030T20 | 1030V |
| 1040 | 1040T10 | GF2040H | 1040T10 | 1040H | 1040T20 | GF2040V | 1040T20 | 1040V |
| 1050 | 1050T10 | GF2050H | 1050T10 | 1050H | 1050T20 | GF2050V | 1050T20 | 1050V |
| 1060 | 1060T10 | GF2060H | 1060T10 | 1060H | 1060T20 | GF2060V | 1060T20 | 1060V |
| 1070 | 1070T10 | GF2070H | 1070T10 | 1070H | 1070T20 | GF2070V | 1070T20 | 1070V |
| 1080 | 1080T10 | GF2080H | 1080T10 | 1080H | 1080T20 | GF2080V | 1080T20 | 1080V |
| 1090 | 1090T10 | GF2090H | 1090T10 | 1090H | 1090T20 | GF2090V | 1090T20 | 1090V |
| 1100 | 1100T10 | GF2100H | 1100T10 | 1100H | 1100T20 | GF2100V | 1100T20 | 1100V |
| 1110 | 1110T10 | GF2110H | 1110T10 | 1110H | 1110T20 | GF2110V | 1110T20 | 1110V |
| 1120 | 1120T10 | GF2120H | 1120T10 | 1120H | 1120T20 | GF2120V | 1120T20 | 1120V |
| 1130 | 1130T10 | GF2130H | 1130T10 | 1130H | 1130T20 | GF2130V | 1130T20 | 1130V |
| 1140 | 1140T10 | GF2140H | 1140T10 | 1140H | 1140T20 | GF2140V | 1140T20 | 1140V |
| 1150 | 1150T10 | — | — | — | — | — | — | — |
| 1160 | 1160T10 | — | — | — | — | — | — | — |
| 1170 | 1170T10 | — | — | — | — | — | — | — |
| 1180 | 1180T10 | — | — | — | — | — | — | — |
| 1190 | 1190T10 | — | — | — | — | — | — | — |
| 1200 | 1200T10 | — | — | — | — | — | — | — |


GD

Grid Series Misalignment Capacity


| Size | P | X-Y | P | X-Y | G |
|------|-------------------------------|---------|------------------------------|---------|----------------|
| | Max Installation Misalignment | | Max Operational Misalignment | | Normal Gap 10% |
| | Parallel | Angular | Parallel | Angular | |
| 1020 | 0.006 | 0.002 | 0.012 | 0.010 | 0.118 |
| 1030 | 0.006 | 0.003 | 0.012 | 0.011 | 0.118 |
| 1040 | 0.006 | 0.003 | 0.012 | 0.013 | 0.118 |
| 1050 | 0.008 | 0.004 | 0.016 | 0.015 | 0.118 |
| 1060 | 0.008 | 0.004 | 0.016 | 0.018 | 0.118 |
| 1070 | 0.008 | 0.005 | 0.016 | 0.020 | 0.118 |
| 1080 | 0.008 | 0.006 | 0.016 | 0.024 | 0.118 |
| 1090 | 0.001 | 0.007 | 0.016 | 0.028 | 0.118 |
| 1100 | 0.010 | 0.008 | 0.020 | 0.032 | 0.177 |
| 1110 | 0.010 | 0.009 | 0.020 | 0.035 | 0.177 |
| 1120 | 0.011 | 0.010 | 0.022 | 0.040 | 0.236 |
| 1130 | 0.011 | 0.012 | 0.022 | 0.047 | 0.236 |
| 1140 | 0.011 | 0.013 | 0.022 | 0.053 | 0.236 |
| 1150 | 0.012 | 0.015 | 0.024 | 0.061 | 0.236 |
| 1160 | 0.012 | 0.017 | 0.024 | 0.070 | 0.236 |
| 1170 | 0.012 | 0.020 | 0.024 | 0.079 | 0.236 |
| 1180 | 0.015 | 0.022 | 0.030 | 0.089 | 0.236 |
| 1190 | 0.015 | 0.024 | 0.030 | 0.096 | 0.236 |
| 1200 | 0.015 | 0.027 | 0.030 | 0.107 | 0.236 |



Normal Gap




Parallel Misalignment




Angular Misalignment

Note: ■ Misalignment ratings pertain to both standard and spacer grid couplings.


Misalignment Capacity:



Parallel: The movement of the grid in the hub grooves accommodates parallel misalignment and still permits full functioning of the grid-groove action in damping out shock and vibration.




Angular: Under angular misalignment, the grid-groove design permits a rocking and sliding action of the grid and hubs without any loss of power through the resilient grid.




Axial: End float is permitted for both driving and driven members because the grid slides freely in the grooves.

Horizontal Style Grid Couplings

Grid couplings with horizontally split covers are ideal for limited space applications. The cover design allows for easy access to the grid. In addition, this cover style is well-suited for reversing service applications.

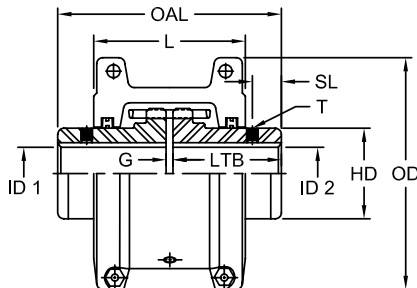

1020-1150

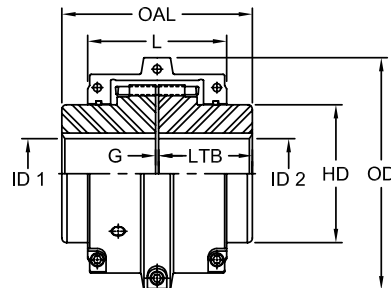

1160-1200


Horizontal Style Dimensional Data

| Size | OAL in | L in | Set Screw | | ID 1 - ID2 | | | | G in | LTB in | OD in | HD in | Maximum Torque | | Weight Solid lbs | Moment of Inertia WR ² lb-in ² Solid |
|------|-----------|---------|-----------|---------|------------|-----|----------|-----|---------|-----------|----------|----------|----------------|---------|------------------------|---|
| | | | Location | Size | Min Bore | | Max Bore | | | | | | in-lbs | Nm | | |
| | | | | | in | mm | in | mm | | | | | | | | |
| 1020 | 3.88 | 2.63 | 0.50 | #8-32 | 0.500 | 13 | 1.125 | 29 | 0.13 | 1.88 | 4.00 | 1.56 | 460 | 52 | 4.2 | 4.830 |
| 1030 | 3.88 | 2.69 | 0.31 | #8-32 | 0.500 | 13 | 1.375 | 35 | 0.13 | 1.88 | 4.38 | 1.94 | 1,320 | 149 | 5.7 | 7.610 |
| 1040 | 4.13 | 2.75 | 0.44 | #10-24 | 0.500 | 13 | 1.625 | 41 | 0.13 | 2.00 | 4.63 | 2.25 | 2,200 | 249 | 7.4 | 11.190 |
| 1050 | 4.88 | 3.13 | 0.62 | #10-24 | 0.500 | 13 | 1.875 | 48 | 0.13 | 2.38 | 5.44 | 2.63 | 3,850 | 435 | 12.0 | 24.850 |
| 1060 | 5.13 | 3.63 | 0.44 | #10-24 | 0.750 | 19 | 2.125 | 54 | 0.13 | 2.50 | 5.94 | 3.00 | 6,050 | 683 | 16.0 | 40.660 |
| 1070 | 6.13 | 3.75 | 0.88 | 1/4-20 | 0.750 | 19 | 2.500 | 64 | 0.13 | 3.00 | 6.38 | 3.44 | 8,800 | 994 | 23.0 | 63.180 |
| 1080 | 7.13 | 4.56 | 0.94 | 1/4-20 | 1.000 | 25 | 3.000 | 76 | 0.13 | 3.50 | 7.63 | 4.13 | 18,150 | 2 051 | 39.0 | 154.000 |
| 1090 | 7.88 | 4.81 | 1.03 | 5/16-18 | 1.000 | 25 | 3.500 | 89 | 0.13 | 3.88 | 7.38 | 4.88 | 33,000 | 3 728 | 56.0 | 269.000 |
| 1100 | 9.69 | 6.13 | — | — | 1.625 | 41 | 4.000 | 102 | 0.19 | 4.75 | 9.88 | 5.59 | 55,550 | 6 276 | 93.0 | 609.000 |
| 1110 | 10.19 | 6.36 | — | — | 1.625 | 41 | 4.500 | 114 | 0.19 | 5.00 | 10.63 | 6.31 | 82,500 | 9 321 | 120.0 | 923.000 |
| 1120 | 12.00 | 7.55 | — | — | 2.375 | 60 | 5.000 | 127 | 0.25 | 5.88 | 12.13 | 7.06 | 121,000 | 13 671 | 179.0 | 1,755.000 |
| 1130 | 13.00 | 7.69 | — | — | 2.625 | 67 | 6.000 | 152 | 0.25 | 6.38 | 13.63 | 8.56 | 176,000 | 19 884 | 266.0 | 3,375.000 |
| 1140 | 14.75 | 7.92 | — | — | 2.625 | 67 | 7.000 | 178 | 0.25 | 7.25 | 15.13 | 10.00 | 253,000 | 28 584 | 392.0 | 6,306.000 |
| 1150 | 14.64 | 8.42 | — | — | 3.000 | 76 | 8.000 | 203 | 0.25 | 7.20 | 17.84 | 10.60 | 352,000 | 39 769 | 523.0 | — |
| 1160 | 15.83 | 10.43 | — | — | 4.188 | 106 | 9.000 | 229 | 0.25 | 7.80 | 19.74 | 12.00 | 495,000 | 55 925 | 720.0 | — |
| 1170 | 17.24 | 11.85 | — | — | 4.188 | 106 | 10.000 | 254 | 0.25 | 8.50 | 22.30 | 14.00 | 660,000 | 74 567 | 1,022.5 | — |
| 1180 | 19.04 | 12.24 | — | — | 5.125 | 130 | 11.000 | 279 | 0.25 | 9.40 | 24.80 | 15.50 | 915,200 | 103 399 | 1,341.7 | — |
| 1190 | 20.64 | 12.80 | — | — | 6.000 | 152 | 12.000 | 305 | 0.25 | 10.20 | 26.60 | 17.20 | 1,210,000 | 136 706 | 1,710.0 | — |
| 1200 | 22.24 | 14.00 | — | — | 6.000 | 152 | 13.000 | 330 | 0.25 | 11.00 | 29.80 | 19.60 | 1,650,000 | 186 417 | 2,331.0 | — |

- Notes: ■ 2 indicates: Based on application data, larger bores may be possible - contact Lovejoy Application Engineering.
 ■ Sizes 1020 through 1090 are clearance fit with 2 set screws at 90°, sizes 1100 and larger are interference fit with no set screw.
 ■ Maximum bores are less than shown above when an interference fit and set screw are required - refer to Lovejoy Application Engineering.
 ■ See pages GD-9 for performance data and GD-14 for misalignment capacity.

Vertical Style Grid Couplings

Vertically split cover design grid couplings are ideal for applications with higher operating speeds. Sizes 1020-1140 are stamped steel. This cover style offers superior protection and supreme performance.

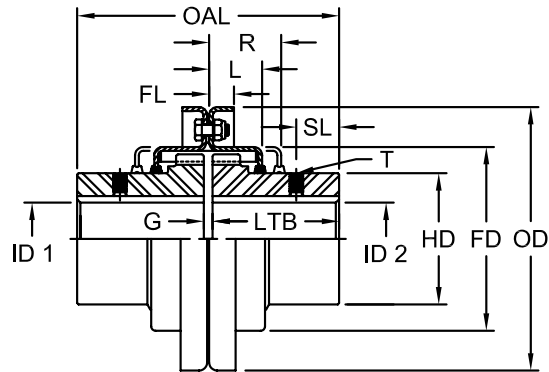

1020-1140


Vertical Style Dimensional Data

| Size | OAL in | R in | L in | FL in | Set Screw | | ID1 - ID2 | | | | G in | LTB in | OD in | FD in | HD in | Weight Solid lbs | Moment of Inertia WR ² lb-in ² Solid |
|------|-----------|---------|---------|----------|-----------|---------|-----------|----|----------|-----|---------|-----------|----------|----------|----------|------------------------|---|
| | | | | | Location | Size | Min Bore | | Max Bore | | | | | | | | |
| | | | | | | | in | mm | in | mm | | | | | | | |
| 1020 | 3.88 | 1.88 | 0.96 | 0.38 | 0.50 | #8-32 | 0.500 | 13 | 1.125 | 29 | 0.13 | 1.88 | 4.38 | 2.50 | 1.56 | 4.3 | 5.320 |
| 1030 | 3.88 | 1.88 | 1.00 | 0.38 | 0.31 | #8-32 | 0.500 | 13 | 1.375 | 35 | 0.13 | 1.88 | 4.75 | 2.88 | 1.94 | 5.7 | 7.990 |
| 1040 | 4.13 | 2.00 | 1.03 | 0.38 | 0.44 | #10-24 | 0.500 | 13 | 1.625 | 41 | 0.13 | 2.00 | 5.06 | 3.25 | 2.25 | 7.4 | 11.990 |
| 1050 | 4.88 | 2.38 | 1.24 | 0.47 | 0.62 | #10-24 | 0.500 | 13 | 1.875 | 48 | 0.13 | 2.38 | 5.81 | 3.88 | 2.63 | 12.0 | 25.760 |
| 1060 | 5.13 | 2.50 | 1.27 | 0.50 | 0.44 | #10-24 | 0.750 | 19 | 2.125 | 54 | 0.13 | 2.50 | 6.38 | 4.38 | 3.00 | 16.0 | 41.160 |
| 1070 | 6.13 | 2.63 | 1.33 | 0.50 | 0.88 | 1/4-20 | 0.750 | 19 | 2.500 | 64 | 0.13 | 3.00 | 6.81 | 4.88 | 3.44 | 23.0 | 61.680 |
| 1080 | 7.13 | 3.50 | 1.74 | 0.50 | 0.94 | 1/4-20 | 1.000 | 25 | 3.000 | 76 | 0.13 | 3.50 | 7.13 | 5.88 | 4.13 | 39.0 | 148.000 |
| 1090 | 7.88 | 3.75 | 1.86 | 0.50 | 1.03 | 5/16-18 | 1.000 | 25 | 3.500 | 89 | 0.13 | 3.88 | 7.88 | 6.63 | 4.88 | 56.0 | 272.000 |
| 1100 | 9.69 | 4.75 | 2.38 | 0.63 | — | — | 1.625 | 41 | 4.000 | 102 | 0.19 | 4.75 | 9.69 | 7.75 | 5.59 | 93.0 | 608.000 |
| 1110 | 10.19 | 4.88 | 2.50 | 0.63 | — | — | 1.625 | 41 | 4.500 | 114 | 0.19 | 5.00 | 11.25 | 8.50 | 6.31 | 120.0 | 930.000 |
| 1120 | 12.00 | 5.63 | 2.94 | 0.68 | — | — | 2.375 | 60 | 5.000 | 127 | 0.25 | 5.88 | 12.56 | 9.63 | 7.06 | 180.0 | 1,611.000 |
| 1130 | 13.00 | 5.75 | 3.00 | 0.82 | — | — | 2.625 | 67 | 6.000 | 152 | 0.25 | 6.38 | 14.88 | 11.13 | 8.56 | 270.0 | 3,568.000 |
| 1140 | 14.75 | 6.13 | 3.13 | 0.82 | — | — | 2.625 | 67 | 7.000 | 178 | 0.25 | 7.80 | 16.38 | 12.63 | 10.00 | 397.0 | 6,431.000 |

- Notes:
- 2 indicates: Based on application data, larger bores may be possible - contact Lovejoy Application Engineering.
 - Sizes 1020 through 1090 are clearance fit with 2 set screws one over the keyway and one at 90°, sizes 1100 and larger are interference fit with no set screw.
 - Maximum bores are less than shown above when an interference fit and set screw are required - refer to Lovejoy Application Engineering.
 - See pages GD-9 for performance data and GD-14 for misalignment capacity.

Spacer Style Grid Couplings

The full spacer design grid coupling is ideal for pump applications. The drop-out section allows for pump servicing.

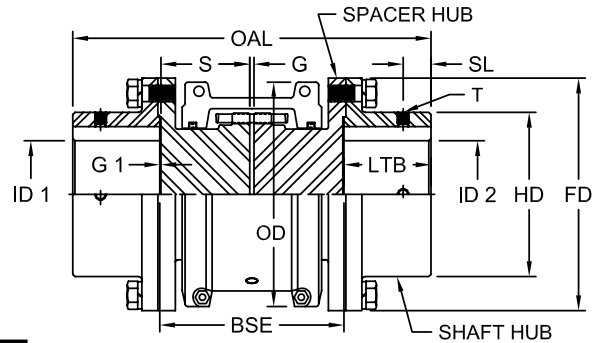

Grid Series Spacer Style Performance Data

| Size | Basic HP Ratings @ Varying RPM | | | Torque Ratings | | Max RPM x 1000 |
|------|--------------------------------|--------|--------|----------------|-------|----------------|
| | 100 | 1200 | 1800 | in-lbs | Nm | |
| 1020 | 0.67 | 8.04 | 12.06 | 422 | 48 | 3.600 |
| 1030 | 1.88 | 22.56 | 33.84 | 1,200 | 136 | 3.600 |
| 1040 | 3.22 | 38.64 | 57.96 | 2,000 | 226 | 3.600 |
| 1050 | 5.49 | 65.88 | 98.82 | 3,500 | 395 | 3.600 |
| 1060 | 8.71 | 104.52 | 156.78 | 5,500 | 621 | 3.600 |
| 1070 | 12.73 | 152.76 | 229.14 | 8,000 | 904 | 3.600 |
| 1080 | 26.13 | 313.56 | 470.34 | 16,500 | 1 864 | 3.600 |
| 1090 | 47.57 | 570.84 | 856.26 | 30,000 | 3 390 | 3.600 |

Grid Series Spacer Style Dimensional Data

| Size | OAL | S | G | SL | T | ID1 - ID2 | | | | LTB | G1 | OD | BSE | FD | HD |
|------|-------|------|------|------|-----------|-----------|-------|----------|-----|------|------|------|------|------|------|
| | | | | | | Min Bore | | Max Bore | | | | | | | |
| | | | | | | in | mm | in | mm | | | | | | |
| 1020 | 6.26 | 1.63 | 0.19 | 0.30 | # 8-32 | Solid | Solid | 1.38 | 35 | 1.38 | 0.03 | 4.00 | 3.50 | 3.38 | 2.06 |
| | 7.76 | 2.38 | | | | 5.00 | | | | | | | | | |
| 1030 | 6.74 | 1.63 | 0.19 | 0.38 | # 8-32 | Solid | Solid | 1.63 | 41 | 1.62 | 0.03 | 4.38 | 3.50 | 3.69 | 2.34 |
| | 8.24 | 2.38 | | | | | | | | | | | 5.00 | | |
| | 10.49 | 3.50 | | | | | | | | | | | 7.25 | | |
| 1040 | 7.74 | 1.63 | 0.19 | 1.04 | # 10-24 | Solid | Solid | 2.13 | 54 | 2.12 | 0.03 | 4.62 | 3.50 | 4.44 | 3.09 |
| | 9.24 | 2.38 | | | | | | | | | | | 5.00 | | |
| | 11.49 | 3.50 | | | | | | | | | | | 7.25 | | |
| 1050 | 9.76 | 2.38 | 0.19 | 0.78 | # 10-24 | Solid | Solid | 2.38 | 60 | 2.38 | 0.03 | 5.44 | 5.00 | 4.94 | 3.44 |
| | 12.01 | 3.50 | | | | | | | | | | | 7.25 | | |
| 1060 | 10.76 | 2.34 | 0.19 | 1.18 | # 10-24 | Solid | Solid | 2.88 | 73 | 2.88 | 0.06 | 5.94 | 5.00 | 5.69 | 4.06 |
| | 13.01 | 3.47 | | | | | | | | | | | 7.25 | | |
| 1070 | 11.24 | 2.37 | 0.19 | 1.28 | # 1/4-20 | Solid | Solid | 3.13 | 79 | 3.12 | 0.06 | 6.38 | 5.00 | 6.00 | 4.31 |
| | 13.49 | 3.47 | | | | | | | | | | | 7.25 | | |
| 1080 | 14.25 | 3.47 | 0.19 | 1.54 | # 1/4-20 | Solid | Solid | 3.50 | 89 | 3.50 | 0.06 | 7.62 | 7.25 | 7.00 | 4.81 |
| 1090 | 15.25 | 3.47 | 0.19 | 1.76 | # 5-16-18 | Solid | Solid | 4.00 | 102 | 4.00 | 0.06 | 8.38 | 7.25 | 8.25 | 5.62 |

Notes: ■ Couplings supplied to American Gear Manufacturers Association (AGMA) standard clearance fit and 2 set screws @ 90°.
 ■ For sizes larger than 1090, consult Lovejoy Application Engineering.
 ■ Changes in the between shaft end (BSE) measurement will change both the spacer hub length ("S" dimension) and the coupling overall length (OAL).
 ■ To calculate the BSE, use the following formula: $BSE = (S \times 2) + G + (G1 \times 2)$.



Grid

Full Spacer / Half Spacer

Dimensional Data

Spacer Style Grid Couplings

The Grid Spacer coupling consists of:

- 2 shaft hubs
- 2 spacer hubs
- 1 cover and Grid set:
 - 1 Grid spring
 - 1 Grid cover set
 - 1 gasket
 - 2 seals
 - 1 hardware package

Grid Series Full Spacer Dimensional Data

| Size | Spacer Hubs Dim | BSE (in) | | | | | | | | | | | | | | |
|------|-----------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | 3.500 | 3.938 | 4.250 | 4.375 | 4.688 | 5.000 | 5.219 | 5.375 | 5.656 | 5.813 | 5.969 | 6.125 | 6.938 | 7.094 | 7.250 |
| 1020 | S | 1.625 | 1.625 | 1.625 | 2.062 | 2.062 | 2.375 | — | — | — | — | — | — | — | — | — |
| | S | 1.625 | 2.062 | 2.375 | 2.062 | 2.375 | 2.375 | — | — | — | — | — | — | — | — | — |
| 1030 | S | 1.625 | 1.625 | 1.625 | 2.062 | 2.062 | 2.375 | — | 1.625 | — | 2.062 | — | 2.375 | — | — | 3.500 |
| | S | 1.625 | 2.062 | 2.375 | 2.062 | 2.375 | 2.375 | — | 3.500 | — | 3.500 | — | 3.500 | — | — | 3.500 |
| 1040 | S | 1.625 | 1.625 | 1.625 | 2.062 | 2.062 | 2.375 | 1.625 | 1.625 | 2.062 | 2.062 | 2.375 | 2.375 | 3.444 | 3.444 | 3.500 |
| | S | 1.625 | 2.062 | 2.375 | 2.062 | 2.375 | 2.375 | 3.344 | 3.500 | 3.344 | 3.500 | 3.344 | 3.500 | 3.444 | 3.500 | 3.500 |
| 1050 | S | — | — | — | 2.062 | 2.062 | 2.375 | — | — | 2.062 | 2.062 | 2.375 | 2.375 | 3.444 | 3.344 | 3.500 |
| | S | — | — | — | 2.062 | 2.375 | 2.375 | — | — | 3.344 | 3.500 | 3.344 | 3.500 | 3.444 | 3.500 | 3.500 |
| 1060 | S | — | — | — | — | — | 2.344 | — | — | — | — | — | 2.344 | — | — | 3.469 |
| | S | — | — | — | — | — | 2.344 | — | — | — | — | — | 3.469 | — | — | 3.469 |
| 1070 | S | — | — | — | — | — | 2.344 | — | — | — | — | — | 2.344 | — | — | 3.469 |
| | S | — | — | — | — | — | 2.344 | — | — | — | — | — | 3.469 | — | — | 3.469 |
| 1080 | S | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 3.469 |
| | S | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 3.469 |
| 1090 | S | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 3.469 |
| | S | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 3.469 |

Note: ■ To achieve the Between Shaft End (BSE) dimension shown, use the two spacer hubs with the specified "S" lengths. To calculate the BSE, use the following formula: $BSE = (S \times 2) + G + (G1 \times 2)$.

Grid Series Half Spacer Dimensional Data

| Size | BSE (in) | | | | |
|-------|----------|-------|-------|-------|-------|
| | 1.781 | 2.219 | 2.531 | 3.500 | 3.656 |
| 1020 | 1.625 | 2.062 | 2.375 | — | — |
| Hub S | | | | | |
| 1030 | 1.625 | 2.062 | 2.375 | — | 3.500 |
| Hub S | | | | | |
| 1040 | 1.625 | 2.062 | 2.375 | 3.344 | 3.500 |
| Hub S | | | | | |
| 1050 | — | — | 2.375 | 3.344 | 3.500 |
| Hub S | | | | | |
| 1060 | — | — | 2.344 | — | 3.469 |
| Hub S | | | | | |
| 1070 | — | — | 2.344 | — | 3.469 |
| Hub S | | | | | |
| 1080 | — | — | — | — | 3.469 |
| Hub S | | | | | |
| 1090 | — | — | — | — | 3.469 |
| Hub S | | | | | |

Note: ■ To achieve the Between Shaft End (BSE) dimension shown, use the spacer hub with the specified "S" length.