


Section 2.

Metric V - Sheaves

SPZ - SPA - SPB - SPC for Taper Bushing (DIN 2211)

2A


METRIC V SHEAVES

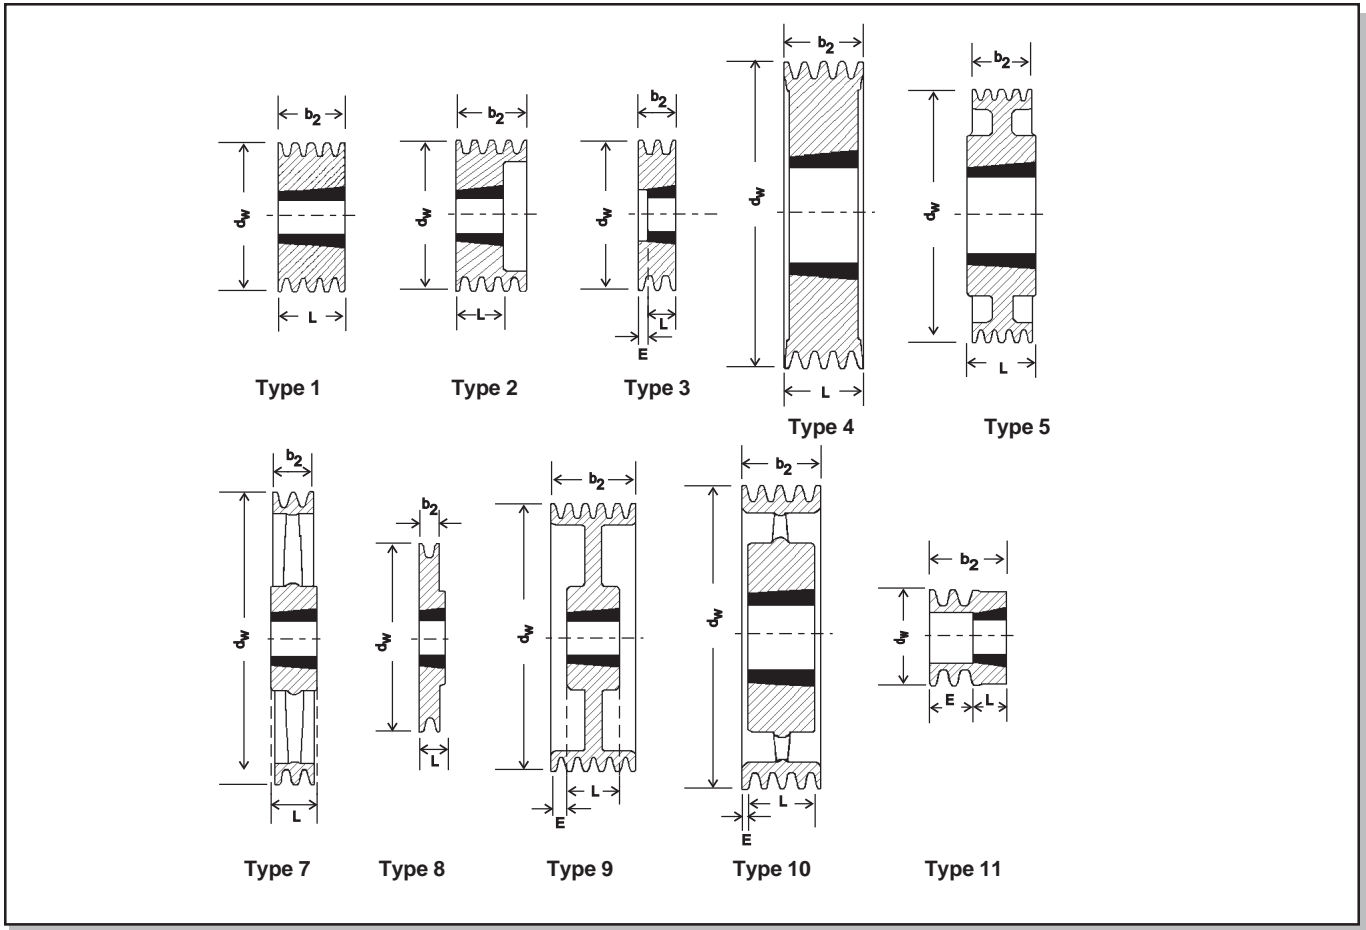

CAUTION: - Metric Sheaves requiring taper bushing 2517 OR 3535 MUST use *METRIC* 2517 or 3535

PART NUMBER EXAMPLE:

TB-SPZ117/2

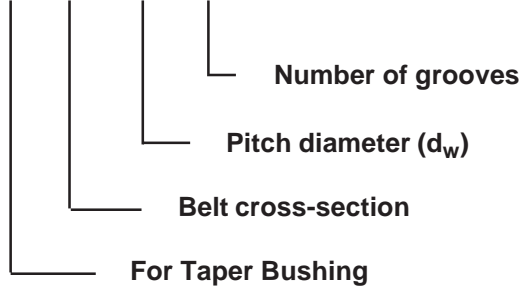

All dimensions in millimeters.

Section SPZ /10

Metric V-Sheaves

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPZ60/1	1008	0.2	29.79	TB-SPZ112/1	1610	1.0	43.75
TB-SPZ60/2	1108	0.6	36.36	TB-SPZ112/2	1610	1.3	53.40
TB-SPZ63/1	1108	0.2	29.79	TB-SPZ112/3	2012	1.3	64.70
TB-SPZ63/2	1108	0.3	36.36	TB-SPZ112/4	2012	1.5	84.22
TB-SPZ63/3	1108	0.4	41.29	TB-SPZ112/5	2012	1.8	96.33
TB-SPZ67/1	1108	0.3	30.20	TB-SPZ118/1	1610	0.9	44.36
TB-SPZ67/2	1108	0.4	37.18	TB-SPZ118/2	1610	1.3	56.28
TB-SPZ67/3	1108	0.5	42.52	TB-SPZ118/3	2012	1.6	70.45
TB-SPZ71/1	1108	0.3	31.22	TB-SPZ118/4	2012	1.8	86.68
TB-SPZ71/2	1108	0.4	38.62	TB-SPZ118/5	2012	1.8	98.39
TB-SPZ71/3	1108	0.6	43.95	TB-SPZ125/1	1610	1.0	46.42
TB-SPZ75/1	1108	0.4	33.07	TB-SPZ125/2	1610	1.4	59.16
TB-SPZ75/2	1210	0.4	39.85	TB-SPZ125/3	2012	1.8	72.30
TB-SPZ75/3	1210	0.5	44.78	TB-SPZ125/4	2012	2.2	92.84
TB-SPZ80/1	1210	0.5	34.10	TB-SPZ125/5	2012	2.3	100.24
TB-SPZ80/2	1210	0.6	41.70	TB-SPZ132/1	1610	1.1	50.53
TB-SPZ80/3	1210	0.7	46.01	TB-SPZ132/2	1610	1.5	61.82
TB-SPZ80/4	1210	0.8	64.30	TB-SPZ132/3	2012	2.3	75.18
TB-SPZ85/1	1210	0.6	35.13	TB-SPZ132/4	2012	2.5	95.51
TB-SPZ85/2	1610	0.5	42.10	TB-SPZ132/5	2517	2.7	102.09
TB-SPZ85/3	1610	0.6	48.27	TB-SPZ140/1	1610	1.2	51.35
TB-SPZ85/4	1610	0.9	67.16	TB-SPZ140/2	1610	1.7	63.68
TB-SPZ85/5	1610	1.0	79.49	TB-SPZ140/3	2012	2.6	78.88
TB-SPZ90/1	1210	0.7	35.94	TB-SPZ140/4	2012	2.9	99.01
TB-SPZ90/2	1610	0.7	43.55	TB-SPZ140/5	2517	3.2	112.97
TB-SPZ90/3	1610	0.8	49.92	TB-SPZ150/1	1610	1.2	52.79
TB-SPZ90/4	1610	1.0	69.42	TB-SPZ150/2	2012	2.0	73.95
TB-SPZ90/5	1610	1.2	82.17	TB-SPZ150/3	2012	3.1	89.76
TB-SPZ95/1	1210	0.7	36.77	TB-SPZ150/4	2517	3.7	103.73
TB-SPZ95/2	1610	0.8	45.81	TB-SPZ150/5	2517	4.0	120.16
TB-SPZ95/3	1610	0.9	53.00	TB-SPZ160/1	1610	1.3	55.03
TB-SPZ95/4	1610	1.1	71.48	TB-SPZ160/2	2012	2.5	77.64
TB-SPZ95/5	1610	1.3	87.91	TB-SPZ160/3	2012	3.6	92.84
TB-SPZ100/1	1210	0.8	39.02	TB-SPZ160/4	2517	4.4	107.83
TB-SPZ100/2	1610	0.9	48.27	TB-SPZ160/5	2517	4.8	123.24
TB-SPZ100/3	1610	1.1	54.63	TB-SPZ170/1	1610	1.5	58.70
TB-SPZ100/4	1610	1.1	73.74	TB-SPZ170/2	2012	2.5	82.15
TB-SPZ100/5	2012	1.3	87.91	TB-SPZ170/3	2012	4.2	101.86
TB-SPZ106/1	1610	0.9	42.32	TB-SPZ170/4	2517	5.3	119.86
TB-SPZ106/2	1610	1.1	50.94	TB-SPZ170/5	2517	5.9	129.87
TB-SPZ106/3	1610	1.3	58.13	TB-SPZ180/1	1610	1.6	61.00
TB-SPZ106/4	1610	1.3	76.61	TB-SPZ180/2	2012	2.5	84.83
TB-SPZ106/5	2012	1.5	91.61	TB-SPZ180/3	2012	4.8	106.81
				TB-SPZ180/4	2517	6.1	123.24
				TB-SPZ180/5	2517	6.3	132.49

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5	6		
Face width b2 (mm)	16	28	40	52	64	76		

Section SPZ /10

Metric V-Sheaves

2A
METRIC V SHEAVES

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPZ190/1	1610	1.8	72.85	TB-SPZ315/1	2012	3.1	138.03
TB-SPZ190/2	2012	2.6	91.78	TB-SPZ315/2	2012	4.2	157.75
TB-SPZ190/3	2012	4.9	107.78	TB-SPZ315/3	2517	6.1	192.26
TB-SPZ190/4	2517	5.3	126.70	TB-SPZ315/4	2517	7.6	224.91
TB-SPZ190/5	2517	6.3	135.43	TB-SPZ315/5	2517	8.6	268.87
TB-SPZ200/1	2012	2.3	74.56	TB-SPZ355/1	2012	3.5	169.46
TB-SPZ200/2	2012	2.8	93.87	TB-SPZ355/2	2012	5.1	195.62
TB-SPZ200/3	2012	3.5	107.83	TB-SPZ355/3	2517	7.3	230.92
TB-SPZ200/4	2517	4.7	128.38	TB-SPZ355/4	2517	8.9	260.17
TB-SPZ200/5	2517	5.5	137.62	TB-SPZ355/5	2517	10.0	312.84
TB-SPZ224/1	2012	2.5	88.33	TB-SPZ400/1	2012	6.0	191.03
TB-SPZ224/2	2012	3.2	110.92	TB-SPZ400/2	2517	6.3	207.92
TB-SPZ224/3	2012	3.9	129.41	TB-SPZ400/3	2517	8.0	267.78
TB-SPZ224/4	2517	5.2	154.06	TB-SPZ400/4	2517	10.1	302.11
TB-SPZ224/5	2517	6.0	177.67	TB-SPZ400/5	3020	11.7	360.48
TB-SPZ250/1	2012	2.8	97.36	TB-SPZ450/1	2517	6.1	257.89
TB-SPZ250/2	2012	3.5	116.26	TB-SPZ450/2	2517	8.2	296.48
TB-SPZ250/3	2012	4.3	145.22	TB-SPZ450/3	2517	9.8	376.97
TB-SPZ250/4	2517	5.7	169.25	TB-SPZ450/4	3020	11.8	432.94
TB-SPZ250/5	2517	6.4	197.19	TB-SPZ450/5	3020	13.9	468.32
TB-SPZ280/1	2012	2.9	129.61	TB-SPZ500/2	2517	9.1	329.16
TB-SPZ280/2	2012	4.0	138.85	TB-SPZ500/3	2517	11.4	429.17
TB-SPZ280/3	2517	5.3	165.56	TB-SPZ500/4	3020	14.3	489.56
TB-SPZ280/4	2517	6.4	195.54	TB-SPZ500/5	3030	17.6	525.84
TB-SPZ280/5	2517	7.1	231.49				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5	6		
Face width b2 (mm)	16	28	40	52	64	76		

Section SPA /13

Metric V-Sheaves

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPA80/1	1210	0.5	35.33	TB-SPA140/1	1610	1.8	57.13
TB-SPA80/2	1210	0.6	44.98	TB-SPA140/2	2012	2.0	76.83
TB-SPA80/3	1210	0.9	55.25	TB-SPA140/3	2517	2.8	95.10
TB-SPA85/1	1210	0.6	35.88	TB-SPA140/4	2517	3.1	113.99
TB-SPA85/2	1210	0.7	46.01	TB-SPA140/5	2517	3.4	131.46
TB-SPA85/3	1210	1.0	58.13	TB-SPA150/1	1610	1.4	59.57
TB-SPA90/1	1210	0.7	37.26	TB-SPA150/2	2012	2.4	80.72
TB-SPA90/2	1610	0.7	48.89	TB-SPA150/3	2517	3.5	99.41
TB-SPA90/3	1610	1.0	60.59	TB-SPA150/4	2517	3.8	120.16
TB-SPA90/4	1615	1.2	80.72	TB-SPA150/5	2517	4.2	133.51
TB-SPA95/1	1210	0.8	39.37	TB-SPA160/1	1610	1.9	61.30
TB-SPA95/2	1610	0.9	50.94	TB-SPA160/2	2012	2.9	83.19
TB-SPA95/3	1610	1.1	62.03	TB-SPA160/3	2517	3.9	103.53
TB-SPA95/4	1615	1.4	82.17	TB-SPA160/4	2517	4.4	123.40
TB-SPA100/1	1610	0.8	41.45	TB-SPA160/5	2517	5.1	138.65
TB-SPA100/2	1610	0.9	54.23	TB-SPA170/1	1610	2.0	69.67
TB-SPA100/3	1610	1.2	62.85	TB-SPA170/2	2012	3.1	96.13
TB-SPA100/4	1615	1.7	89.14	TB-SPA170/3	2517	4.6	112.36
TB-SPA100/5	1615	1.9	105.51	TB-SPA170/4	2517	5.5	130.78
TB-SPA106/1	1610	0.9	43.96	TB-SPA170/5	3020	5.9	188.50
TB-SPA106/2	1610	1.1	56.69	TB-SPA180/1	1610	2.1	69.67
TB-SPA106/3	1610	1.4	70.25	TB-SPA180/2	2012	3.4	96.13
TB-SPA106/4	2012	2.0	91.61	TB-SPA180/3	2517	5.1	112.36
TB-SPA106/5	2012	2.0	111.94	TB-SPA180/4	2517	5.9	132.49
TB-SPA112/1	1610	1.0	46.67	TB-SPA180/5	3020	6.2	195.39
TB-SPA112/2	1610	1.2	57.92	TB-SPA190/1	1610	2.3	78.67
TB-SPA112/3	2012	1.3	73.12	TB-SPA190/2	2012	3.8	107.43
TB-SPA112/4	2012	1.9	97.78	TB-SPA190/3	2517	5.4	121.19
TB-SPA112/5	2012	2.1	117.08	TB-SPA190/4	2517	6.8	139.85
TB-SPA118/1	1610	1.2	49.11	TB-SPA190/5	3020	7.4	214.68
TB-SPA118/2	1610	1.4	62.85	TB-SPA200/1	2012	2.6	78.67
TB-SPA118/3	2012	1.8	76.00	TB-SPA200/2	2517	4.1	107.43
TB-SPA118/4	2012	2.0	102.09	TB-SPA200/3	2517	4.9	121.19
TB-SPA118/5	2012	2.4	120.16	TB-SPA200/4	3020	7.4	140.71
TB-SPA125/1	1610	1.4	51.61	TB-SPA200/5	3020	8.4	200.20
TB-SPA125/2	1610	1.7	66.55	TB-SPA224/1	2012	2.7	108.46
TB-SPA125/3	2012	2.0	83.80	TB-SPA224/2	2517	4.4	121.19
TB-SPA125/4	2012	2.5	106.81	TB-SPA224/3	2517	5.5	139.88
TB-SPA125/5	2012	2.7	123.24	TB-SPA224/4	3020	7.4	176.65
TB-SPA132/1	1610	1.6	53.46	TB-SPA224/5	3020	8.3	224.42
TB-SPA132/2	2012	1.8	69.42	TB-SPA250/1	2012	2.9	117.70
TB-SPA132/3	2012	2.3	87.71	TB-SPA250/2	2517	4.8	139.88
TB-SPA132/4	2517	2.6	108.86	TB-SPA250/3	2517	5.9	164.53
TB-SPA132/5	2517	2.9	126.32	TB-SPA250/4	3020	8.0	209.52
				TB-SPA250/5	3020	9.0	240.32

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5			
Face width b2 (mm)	20	35	50	65	80			

Section SPA /13

Metric V-Sheaves

2A

METRIC V SHEAVES

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPA280/1	2012	3.3	133.51				
TB-SPA280/2	2517	5.4	161.45				
TB-SPA280/3	2517	6.7	191.23				
TB-SPA280/4	3020	8.8	234.58				
TB-SPA280/5	3535	15.5	285.51				
TB-SPA315/1	2012	3.6	151.79				
TB-SPA315/2	2517	6.0	183.63				
TB-SPA315/3	3020	8.3	217.72				
TB-SPA315/4	3020	9.7	268.06				
TB-SPA315/5	3535	17.0	330.70				
TB-SPA355/1	2012	4.2	173.06				
TB-SPA355/2	2517	6.7	205.97				
TB-SPA355/3	3020	9.2	252.97				
TB-SPA355/4	3020	11.0	314.51				
TB-SPA355/5	3535	18.6	384.11				
TB-SPA400/1	2012	4.9	226.82				
TB-SPA400/2	2517	8.1	249.00				
TB-SPA400/3	3020	11.0	293.51				
TB-SPA400/4	3020	12.8	365.32				
TB-SPA400/5	3535	21.0	451.89				
TB-SPA450/1	2012	7.0	278.00				
TB-SPA450/2	2517	10.3	295.89				
TB-SPA450/3	3020	14.1	369.92				
TB-SPA450/4	3020	15.5	438.00				
TB-SPA450/5	3535	24.3	551.51				
TB-SPA500/1	2517	8.0	300.00				
TB-SPA500/2	2517	11.6	325.00				
TB-SPA500/3	3020	16.0	394.16				
TB-SPA500/4	3020	18.2	495.00				
TB-SPA500/5	3535	27.3	631.62				
TB-SPA630/1	2517	10.1	424.00				
TB-SPA630/2	3020	16.0	529.00				
TB-SPA630/3	3020	22.0	674.00				
TB-SPA630/4	3535	30.8	780.00				
TB-SPA630/5	3535	33.7	972.00				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5			
Face width b2 (mm)	20	35	50	65	80			

Section SPB /17

Metric V-Sheaves

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPB125/1	1610	1.5	72.93	TB-SPB200/1	2012	5.0	124.31
TB-SPB125/2	2012	1.9	88.94	TB-SPB200/2	2517	5.4	139.68
TB-SPB125/3	2012	2.4	102.29	TB-SPB200/3	2517	6.5	153.03
TB-SPB125/4	2012	3.0	118.11	TB-SPB200/4	3020	8.8	176.65
TB-SPB132/1	1610	1.8	78.32	TB-SPB200/5	3020	9.1	195.14
TB-SPB132/2	2012	2.2	95.51	TB-SPB200/6	3020	10.3	217.72
TB-SPB132/3	2012	2.8	112.97	TB-SPB200/8	3535	13.5	449.34
TB-SPB132/4	2012	3.4	132.49	TB-SPB212/1	2012	4.2	127.19
TB-SPB140/1	1610	2.3	82.06	TB-SPB212/2	2517	4.9	147.90
TB-SPB140/2	2012	2.7	96.54	TB-SPB212/3	2517	6.0	160.21
TB-SPB140/3	2012	3.3	120.16	TB-SPB212/4	3020	9.8	182.81
TB-SPB140/4	2517	3.7	137.62	TB-SPB212/5	3020	11.0	202.33
TB-SPB140/5	2517	4.5	157.13	TB-SPB212/6	3535	14.3	250.59
TB-SPB140/6	2517	4.6	178.70	TB-SPB212/8	3535	16.6	487.65
TB-SPB150/1	1610	2.7	84.39	TB-SPB224/1	2012	4.7	128.55
TB-SPB150/2	2012	3.1	101.67	TB-SPB224/2	2517	5.3	153.03
TB-SPB150/3	2517	3.9	125.30	TB-SPB224/3	2517	6.3	176.65
TB-SPB150/4	2517	4.4	140.71	TB-SPB224/4	3020	11.3	210.54
TB-SPB150/5	2517	5.2	160.21	TB-SPB224/5	3020	12.7	242.38
TB-SPB150/6	2517	5.6	182.81	TB-SPB224/6	3535	17.0	289.62
TB-SPB160/1	1610	2.5	88.65	TB-SPB224/8	3535	19.3	519.00
TB-SPB160/2	2012	2.9	106.81	TB-SPB236/1	2012	5.0	138.70
TB-SPB160/3	2517	4.2	131.46	TB-SPB236/2	2517	5.5	160.21
TB-SPB160/4	2517	4.9	148.92	TB-SPB236/3	2517	7.0	192.05
TB-SPB160/5	2517	6.0	166.37	TB-SPB236/4	3020	14.5	231.08
TB-SPB160/6	3020	5.4	188.97	TB-SPB236/5	3535	16.9	263.95
TB-SPB170/1	1610	2.9	97.48	TB-SPB236/6	3535	20.0	314.27
TB-SPB170/2	2012	3.3	116.05	TB-SPB236/8	3535	22.3	557.31
TB-SPB170/3	2517	4.9	134.54	TB-SPB236/10	3535	24.9	1055.78
TB-SPB170/4	2517	5.7	154.06	TB-SPB250/1	2012	5.4	149.27
TB-SPB170/5	3020	6.1	172.54	TB-SPB250/2	2517	5.5	173.56
TB-SPB170/6	3020	6.5	196.16	TB-SPB250/3	3020	7.7	205.41
TB-SPB170/8	3030	9.5	365.62	TB-SPB250/4	3020	19.6	252.56
TB-SPB180/1	1610	4.1	111.17	TB-SPB250/5	3535	21.7	288.59
TB-SPB180/2	2517	4.5	126.34	TB-SPB250/6	3535	23.3	336.87
TB-SPB180/3	2517	5.5	144.81	TB-SPB250/8	3535	27.5	585.18
TB-SPB180/4	2517	6.9	159.18	TB-SPB250/10	3535	29.3	1088.64
TB-SPB180/5	3020	7.1	178.70	TB-SPB280/1	2012	6.1	168.43
TB-SPB180/6	3020	7.7	200.27	TB-SPB280/2	2517	6.8	205.41
TB-SPB180/8	3030	11.2	386.63	TB-SPB280/3	3020	8.6	237.24
TB-SPB190/1	2012	4.6	113.49	TB-SPB280/4	3020	10.1	293.73
TB-SPB190/2	2517	5.0	133.51	TB-SPB280/5	3535	17.8	338.92
TB-SPB190/3	2517	6.3	152.00	TB-SPB280/6	3535	19.6	389.24
TB-SPB190/4	2517	7.6	168.43	TB-SPB280/8	3535	26.7	616.53
TB-SPB190/5	3020	8.1	185.89	TB-SPB280/10	3535	30.5	1158.48
TB-SPB190/6	3020	9.2	208.49				
TB-SPB190/8	3030	12.4	417.98				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5	6	8	10
Face width b2 (mm)	25	44	63	82	101	120	158	196

Section SPB /17

Metric V-Sheaves

2A

METRIC V SHEAVES

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPB300/2	2517	7.3	229.87	TB-SPB500/2	3020	13.2	424.00
TB-SPB300/3	3020	9.2	269.47	TB-SPB500/3	3535	23.1	533.00
TB-SPB300/4	3020	14.3	330.62	TB-SPB500/4	3535	26.6	618.27
TB-SPB300/5	3535	18.2	394.27	TB-SPB500/5	3535	29.9	758.97
TB-SPB300/6	3535	21.9	463.72	TB-SPB500/6	4040	38.9	875.00
TB-SPB300/8	3535	26.2	674.32	TB-SPB500/8	4040	45.5	1299.24
				TB-SPB500/10	4545	61.0	1971.88
TB-SPB315/1	2012	7.2	192.85				
TB-SPB315/2	2517	7.8	235.19	TB-SPB560/2	3030	17.1	492.00
TB-SPB315/3	3020	9.6	275.25	TB-SPB560/3	3535	25.9	603.00
TB-SPB315/4	3535	17.1	336.87	TB-SPB560/4	3535	29.0	701.50
TB-SPB315/5	3535	18.8	395.41	TB-SPB560/5	4040	35.3	861.67
TB-SPB315/6	3535	23.0	485.98	TB-SPB560/6	4040	43.1	1241.00
TB-SPB315/8	3535	26.0	703.61	TB-SPB560/8	4545	49.0	2074.00
TB-SPB315/10	3535	31.5	1252.97	TB-SPB560/10	4545	55.7	2187.46
TB-SPB335/2	2517	7.8	270.11	TB-SPB630/2	3030	19.3	568.00
TB-SPB335/3	3020	10.5	324.50	TB-SPB630/3	3535	28.9	678.00
TB-SPB335/4	3535	18.3	387.00	TB-SPB630/4	3535	33.3	816.50
TB-SPB335/5	3535	19.5	461.14	TB-SPB630/5	4040	43.1	979.78
TB-SPB335/6	3535	22.0	548.43	TB-SPB630/6	4040	49.2	1547.00
TB-SPB335/8	3535	28.2	790.69	TB-SPB630/8	4545	62.0	2542.00
TB-SPB335/10	4040	36.0	1326.92	TB-SPB630/10	4545	72.0	2292.00
TB-SPB355/2	3020	8.7	272.17	TB-SPB710/3	3535	33.2	1128.00
TB-SPB355/3	3020	10.8	326.50	TB-SPB710/4	3535	39.1	1334.00
TB-SPB355/4	3535	18.6	389.00	TB-SPB710/5	4040	50.2	1676.00
TB-SPB355/5	3535	20.8	463.19	TB-SPB710/6	4545	62.3	1978.00
TB-SPB355/6	3535	22.8	550.48	TB-SPB710/8	4545	71.0	2915.00
TB-SPB355/8	3535	27.0	815.07	TB-SPB710/10	4545	80.0	3465.00
TB-SPB355/10	4040	38.0	1404.96				
TB-SPB400/2	3020	10.0	314.00	TB-SPB800/3	3535	36.7	1564.00
TB-SPB400/3	3535	18.3	389.00	TB-SPB800/4	4040	48.8	1768.00
TB-SPB400/4	3535	20.5	458.00	TB-SPB800/5	4040	56.1	2194.00
TB-SPB400/5	3535	23.4	541.24	TB-SPB800/6	4545	71.4	2507.00
TB-SPB400/6	3535	25.1	637.78	TB-SPB800/8	4545	90.9	3549.00
TB-SPB400/8	4040	36.5	919.57	TB-SPB800/10	4545	102.0	4329.00
TB-SPB400/10	4040	41.0	1602.15				
TB-SPB450/2	3020	12.1	372.00	TB-SPB900/3	3535	46.8	2120.00
TB-SPB450/3	3535	21.9	463.00	TB-SPB900/4	4040	60.0	2571.00
TB-SPB450/4	3535	24.5	548.50	TB-SPB900/5	4545	74.8	2800.00
TB-SPB450/5	3535	27.3	660.37	TB-SPB900/6	4545	81.5	3450.00
TB-SPB450/6	4040	35.5	767.19	TB-SPB900/8	4545	110.0	4354.00
TB-SPB450/8	4040	40.9	1166.88	TB-SPB900/10	5050	126.0	5329.00
TB-SPB450/10	4545	53.5	1799.34				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	1	2	3	4	5	6	8	10
Face width b2 (mm)	25	44	63	82	101	120	158	196

Section SPC /22

Metric V-Sheaves

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPC200/3	2517	9.0	400.00	TB-SPC335/3	3535	22.5	600.00
TB-SPC200/4	3020	10.0	475.00	TB-SPC335/4	3535	26.5	700.00
TB-SPC200/5	3535	14.0	550.00	TB-SPC335/5	3535	30.0	800.00
TB-SPC200/6	3535	17.0	625.00	TB-SPC335/6	3535	35.0	950.00
				TB-SPC335/8	4040	58.0	1325.00
TB-SPC212/3	3020	10.0	425.00				
TB-SPC212/4	3020	12.5	500.00	TB-SPC355/3	3535	22.9	625.00
TB-SPC212/5	3535	15.0	550.00	TB-SPC355/4	3535	28.3	725.00
TB-SPC212/6	3535	18.0	650.00	TB-SPC355/5	3535	32.5	800.00
				TB-SPC355/6	3535	36.0	950.00
TB-SPC224/3	3020	11.0	425.00	TB-SPC355/8	4040	67.5	1400.00
TB-SPC224/4	3535	14.0	500.00	TB-SPC355/10	4545	121.0	2500.00
TB-SPC224/5	3535	16.2	550.00				
TB-SPC224/6	3535	19.0	650.00	TB-SPC375/3	3535	23.8	750.00
TB-SPC224/8	3535	24.9	825.00	TB-SPC375/4	3535	30.0	850.00
				TB-SPC375/5	3535	33.0	925.00
TB-SPC236/3	3020	12.0	475.00	TB-SPC375/6	4040	45.5	1100.00
TB-SPC236/4	3535	17.2	550.00	TB-SPC375/8	4545	68.0	1425.00
TB-SPC236/5	3535	19.1	600.00				
TB-SPC236/6	3535	20.8	700.00	TB-SPC400/3	3535	24.1	800.00
TB-SPC236/8	3535	25.5	900.00	TB-SPC400/4	3535	28.0	875.00
				TB-SPC400/5	3535	34.0	950.00
TB-SPC250/3	3020	14.5	500.00	TB-SPC400/6	4040	48.0	1125.00
TB-SPC250/4	3535	20.7	560.00	TB-SPC400/8	4545	65.0	1450.00
TB-SPC250/5	3535	22.8	625.00	TB-SPC400/10	5050	88.0	2825.00
TB-SPC250/6	3535	26.0	700.00				
TB-SPC250/8	3535	29.7	950.00	TB-SPC425/3	3535	26.0	825.00
TB-SPC250/10	4040	34.0	1400.00	TB-SPC425/4	3535	31.0	925.00
				TB-SPC425/5	4040	45.0	1000.00
TB-SPC265/3	3535	21.2	500.00	TB-SPC425/6	4545	58.0	1200.00
TB-SPC265/4	3535	24.0	600.00	TB-SPC425/8	4545	74.0	1950.00
TB-SPC265/5	3535	26.2	675.00				
TB-SPC265/6	3535	29.0	775.00	TB-SPC450/3	3535	28.6	875.00
TB-SPC265/8	3535	33.3	1000.00	TB-SPC450/4	3535	33.5	1000.00
				TB-SPC450/5	4040	45.0	1125.00
TB-SPC280/3	3535	24.0	525.00	TB-SPC450/6	4545	61.1	1250.00
TB-SPC280/4	3535	29.0	600.00	TB-SPC450/8	5050	78.7	1750.00
TB-SPC280/5	3535	31.0	675.00	TB-SPC450/10	5050	101.0	2950.00
TB-SPC280/6	3535	33.8	800.00				
TB-SPC280/8	3535	37.5	1050.00	TB-SPC475/3	3535	40.0	1000.00
TB-SPC280/10	4040	45.0	1550.00	TB-SPC475/4	3535	47.0	1100.00
				TB-SPC475/5	4040	47.2	1300.00
TB-SPC300/3	3535	21.0	575.00	TB-SPC475/6	4545	62.8	1450.00
TB-SPC300/4	3535	25.0	650.00	TB-SPC475/8	5050	81.5	1750.00
TB-SPC300/5	3535	28.5	725.00				
TB-SPC300/6	3535	29.0	825.00	TB-SPC500/3	3535	30.9	1100.00
TB-SPC300/8	4040	46.5	1175.00	TB-SPC500/4	3535	39.0	1150.00
TB-SPC300/10	4545	53.5	1850.00	TB-SPC500/5	4040	48.7	1350.00
				TB-SPC500/6	4545	60.2	1425.00
TB-SPC315/3	3535	21.6	600.00	TB-SPC500/8	5050	87.4	2000.00
TB-SPC315/4	3535	24.6	675.00	TB-SPC500/10	5050	127.0	3350.00
TB-SPC315/5	3535	29.0	750.00				
TB-SPC315/6	3535	31.4	850.00				
TB-SPC315/8	4040	50.0	1250.00				
TB-SPC315/10	4545	58.0	2225.00				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	2	3	4	5	6	8	10	
Face width b2 (mm)	44	63	82	101	120	158	196	

Section SPC /22

Metric V-Sheaves

2A

METRIC V SHEAVES

PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE	PART NO.	TAPER BUSHING	WEIGHT KG	LIST PRICE
TB-SPC560/3	3535	36.0	1540.00				
TB-SPC560/4	4040	50.0	2020.00				
TB-SPC560/5	4545	63.0	2120.00				
TB-SPC560/6	5050	77.0	2200.00				
TB-SPC560/8	5050	94.0	2550.00				
TB-SPC560/10	5050	115.0	3750.00				
TB-SPC630/3	4040	48.5	2525.00				
TB-SPC630/4	4545	61.0	2700.00				
TB-SPC630/5	5050	77.0	2780.00				
TB-SPC630/6	5050	86.0	2820.00				
TB-SPC630/8	5050	105.5	2880.00				
TB-SPC630/10	5050	130.0	4000.00				
TB-SPC710/3	4040	-	3215.00				
TB-SPC710/4	4545	-	3350.00				
TB-SPC710/5	5050	105.0	3420.00				
TB-SPC710/6	5050	115.0	3475.00				
TB-SPC710/8	5050	145.0	3550.00				
TB-SPC710/10	5050	160.0	4900.00				
TB-SPC800/3	4545	-	3500.00				
TB-SPC800/4	5050	120.0	3640.00				
TB-SPC800/5	5050	125.0	3715.00				
TB-SPC800/6	5050	135.0	3750.00				
TB-SPC800/8	5050	165.0	3900.00				
TB-SPC800/10	5050	185.0	5500.00				
TB-SPC1000/3	5050	-	2750.00				
TB-SPC1000/4	5050	-	3280.00				
TB-SPC1000/5	5050	160.0	3780.00				
TB-SPC1000/6	5050	170.0	4300.00				
TB-SPC1000/8	5050	220.0	5550.00				
TB-SPC1000/10	5050	245.0	7800.00				
TB-SPC1250/3	5050	-	3440.00				
TB-SPC1250/4	5050	-	4100.00				
TB-SPC1250/5	5050	200.0	4600.00				
TB-SPC1250/6	5050	220.0	5425.00				
TB-SPC1250/8	5050	290.0	7100.00				
TB-SPC1250/10	5050	315.0	9950.00				

***CAUTION: Metric sheaves requiring taper bushing 2517 or 3535 MUST use Metric 2517 or 3535 with BS Threads (1/2-12TPI)**

Number of grooves	2	3	4	5	6	8	10	
Face width b2 (mm)	44	63	82	101	120	158	196	

Taper Bushing Part Number

	1008	1108	1210	1215	1310	1610	1615	2012	2517	3020	3030	3525	3535	4040	4545	5050
STANDARD BORES WITH KEYWAY	10	10	11	11	14	14	14	14	16	25	35	35	35	40	55	70
	11	11	12	12	16	16	16	16	18	28	38	38	38	42	60	75
	12	12	14	14	18	18	18	18	19	30	40	40	40	45	65	80
	14	14	16	16	19	19	19	19	20	32	42	42	42	48	70	85
	16	16	18	18	20	20	20	20	22	35	45	45	45	50	75	90
	18	18	19	19	22	22	22	22	24	38	48	48	48	55	80	95
	19	19	20	20	24	24	24	24	25	40	50	50	50	60	85	100
	20	20	22	22	25	25	25	25	29	42	55	55	55	65	90	105
	22	22	24	24	28	28	28	28	30	45	60	60	60	70	95	110
	*24	24	25	25	30	30	30	30	32	48	65	65	65	75	100	115
	*25	25	28	28	32	32	32	32	35	50	70	70	70	80	105	120
		*28	30	30	35	35	35	35	38	55	75	75	75	85	110	125
			*32	*32		38	38	38	40	60		80	80	90		
						40	40	40	42	65		85	85	95		
						*42	*42	42	45	70		*90	90	100		
									45	48	75					
									48	50						
									50	55						
									60							

*INDICATES SHALLOW KEYWAY

LENGTH THROUGH BORE (mm)	22.3	22.3	25.4	38.1	25.4	25.4	38.1	31.8	44.5	50.8	76.2	63.5	88.9	101.6	114.3	127.0

Metric Taper Bushings 2517 and 3535 are not interchangeable with 2517 and 3535 made in USA – Different thread!

METRIC TAPER BUSHINGS – DIN/6885 Part 1

METRIC TAPER BUSHINGS

SHAFT DIAMETER	KEY SIZE WIDTH X HEIGHT	DEPTH OF BUSHING KEYWAY	DEPTH OF SHAFT KEYWAY
6 - 8	2 X 2	1.0	1.2
9 - 10	3 X 3	1.4	1.8
11 - 12	4 X 4	1.8	2.5
13 - 17	5 X 5	2.3	3.0
18 - 22	6 X 6	2.8	3.5
23 - 30	8 X 7	3.3	4.0
31 - 38	10 X 8	3.3	5.0
39 - 44	12 X 8	3.3	5.0
45 - 50	14 X 9	3.8	5.5
51 - 58	16 X 10	4.3	6.0
59 - 65	18 X 11	4.4	7.0
66 - 75	20 X 12	4.9	7.5
76 - 85	22 X 14	5.4	9.0
86 - 95	25 X 14	5.4	9.0
96 - 110	28 X 16	6.4	10.0
111 - 130	32 X 18	7.4	11.0
131 - 150	36 X 20	8.4	12.0
151 - 170	40 X 22	9.4	13.0
171 - 200	45 X 25	10.4	15.0

TAPER BUSHING – LIST PRICE

TAPER BUSHING LIST PRICE	1008 9.09	1108 9.39	1210 10.02	1215 10.97	1310 11.27	1610 11.59	1615 12.05	2012 15.66
TAPER BUSHING LIST PRICE	2517 19.29	3020 28.97	3030 42.28	3525 56.90	3535 59.54	4040 95.55	4545 119.04	5050 192.96