




440 North Fifth Avenue  
Chambersburg, PA 17201

t: 717-264-7161  
f: 717-264-6420  
www.tbwoods.com

Item Number: WE70  
Description: Standard Two Piece Element  
Product Family: Dura-Flex Element

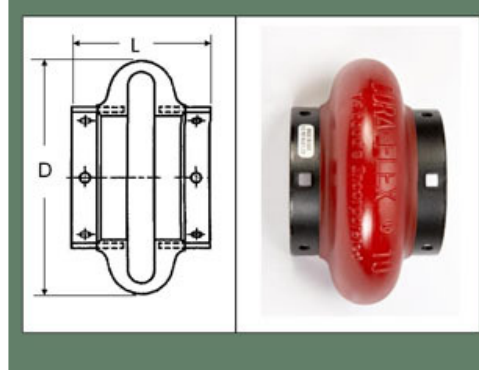

#### Part Specifications

"D" Dimension (in): 14  
 "L" Dimension (in): 6.92  
 Torque Rating (in. lbs.): 22125  
 Stiffness (in.lbs./rad): 205000  
 Capscrews: 1/2-13 UNC x 7/8  
 Capscrew Torque Requirement (ft-lbs): 75 (Must use TB Wood's Capscrews)  
 Temperature Rating: - 40F° to 200F°  
 Maximum Parallel Misalignment (in): 1/8  
 Maximum Misalignment Angular: 2°

#### Performance Data

Material Type: Polyether Urethane  
 Max RPM (rpm): 3600  
 Component Weight (lbs): 20.00  
 Catalog Pages: [PDF F2-4](#)

**Altra Industrial Motion o The Power of Experience**

Warner Electric o TB Wood's Incorporated o Boston Gear o Formsprag Clutch o Stieber Clutch o Marland Clutch o Wichita Clutch  
 Industrial Clutch o Ameridrives Couplings o Nuttall Gear o Delroyd Worm Gear o Kilian Manufacturing o Inertia Dynamics  
 Matrix International o Twiflex Limited o Bibby Transmissions o Huco Dynatork o Warner Linear o Saftek Friction